





Stereo receiver 9090DB

OFF
ON

POWER



PROTECTOR

FILTERS
LOW HIGH



AUDIO MUTING
-20dB



LEFT



RIGHT



SPEAKERS



PHONES



BASS



MIDRANGE



TREBLE



TRIPLE TONE CONTROL



FM MONO
100 102 104 106 108 MHz
100 102 104 106 108 MHz



RIGHT

LOUDNESS

MONO

FM MUTING
OFF

TAPE MONITOR
1 2

METER
REC CAL TONE
OFF ON

POWER LEVEL
DOLBY NR LEVEL

Sansui



VOLUME — BALANCE



LEFT RIGHT

DOLBY NR



PLAY CAL



PLAY
DOLBY FM

OFF REC-1 REC-2



REC LEVEL

DOLBY SYSTEM

SELECTOR



MIC LEVEL



MIC



CAUTION

HIGH VOLTAGE INSIDE. TO PREVENT ELECTRIC SHOCK, DO NOT REMOVE SCREWS OR COVER. NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

ANTENNA



GND

LEFT



RIGHT

TAPE-2 REC/PLAY

PHONO

PREOUT

LEFT



RIGHT

828032554

CAUTION
ELECTRIC SHOCK. DO NOT
USER SERVICEABLE PARTS
ED SERVICE PERSONNEL

CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD
REPLACE ONLY WITH SAME TYPE FUSE. DISCONNECT
POWER SUPPLY CORD BEFORE CHANGING FUSE.



SWITCHED
100W MAX



UNSWITCHED
150W MAX




10A
FUSE at 100V/120V
7A
FUSE at 220V/240V




MODEL NO. 9080DB
STEREO RECEIVER
VOLTAGE..... AC 100/120/220/240 VOLTS - 50/60Hz
POWER..... 435 WATTS (RATED)
SANSUI ELECTRIC CO., LTD.
1-1-1, 3-CHOME, IZUMI, SUGIHAMA-KU, TOKYO, JAPAN

SPEAKERS (8 OHMS)
SYSTEM-A
- RIGHT + + LEFT -
SYSTEM-B
- RIGHT + + LEFT -
SYSTEM-C
- RIGHT + + LEFT -

Three sets of speaker selector switches, each with two red and two white buttons, labeled SYSTEM-A, SYSTEM-B, and SYSTEM-C.

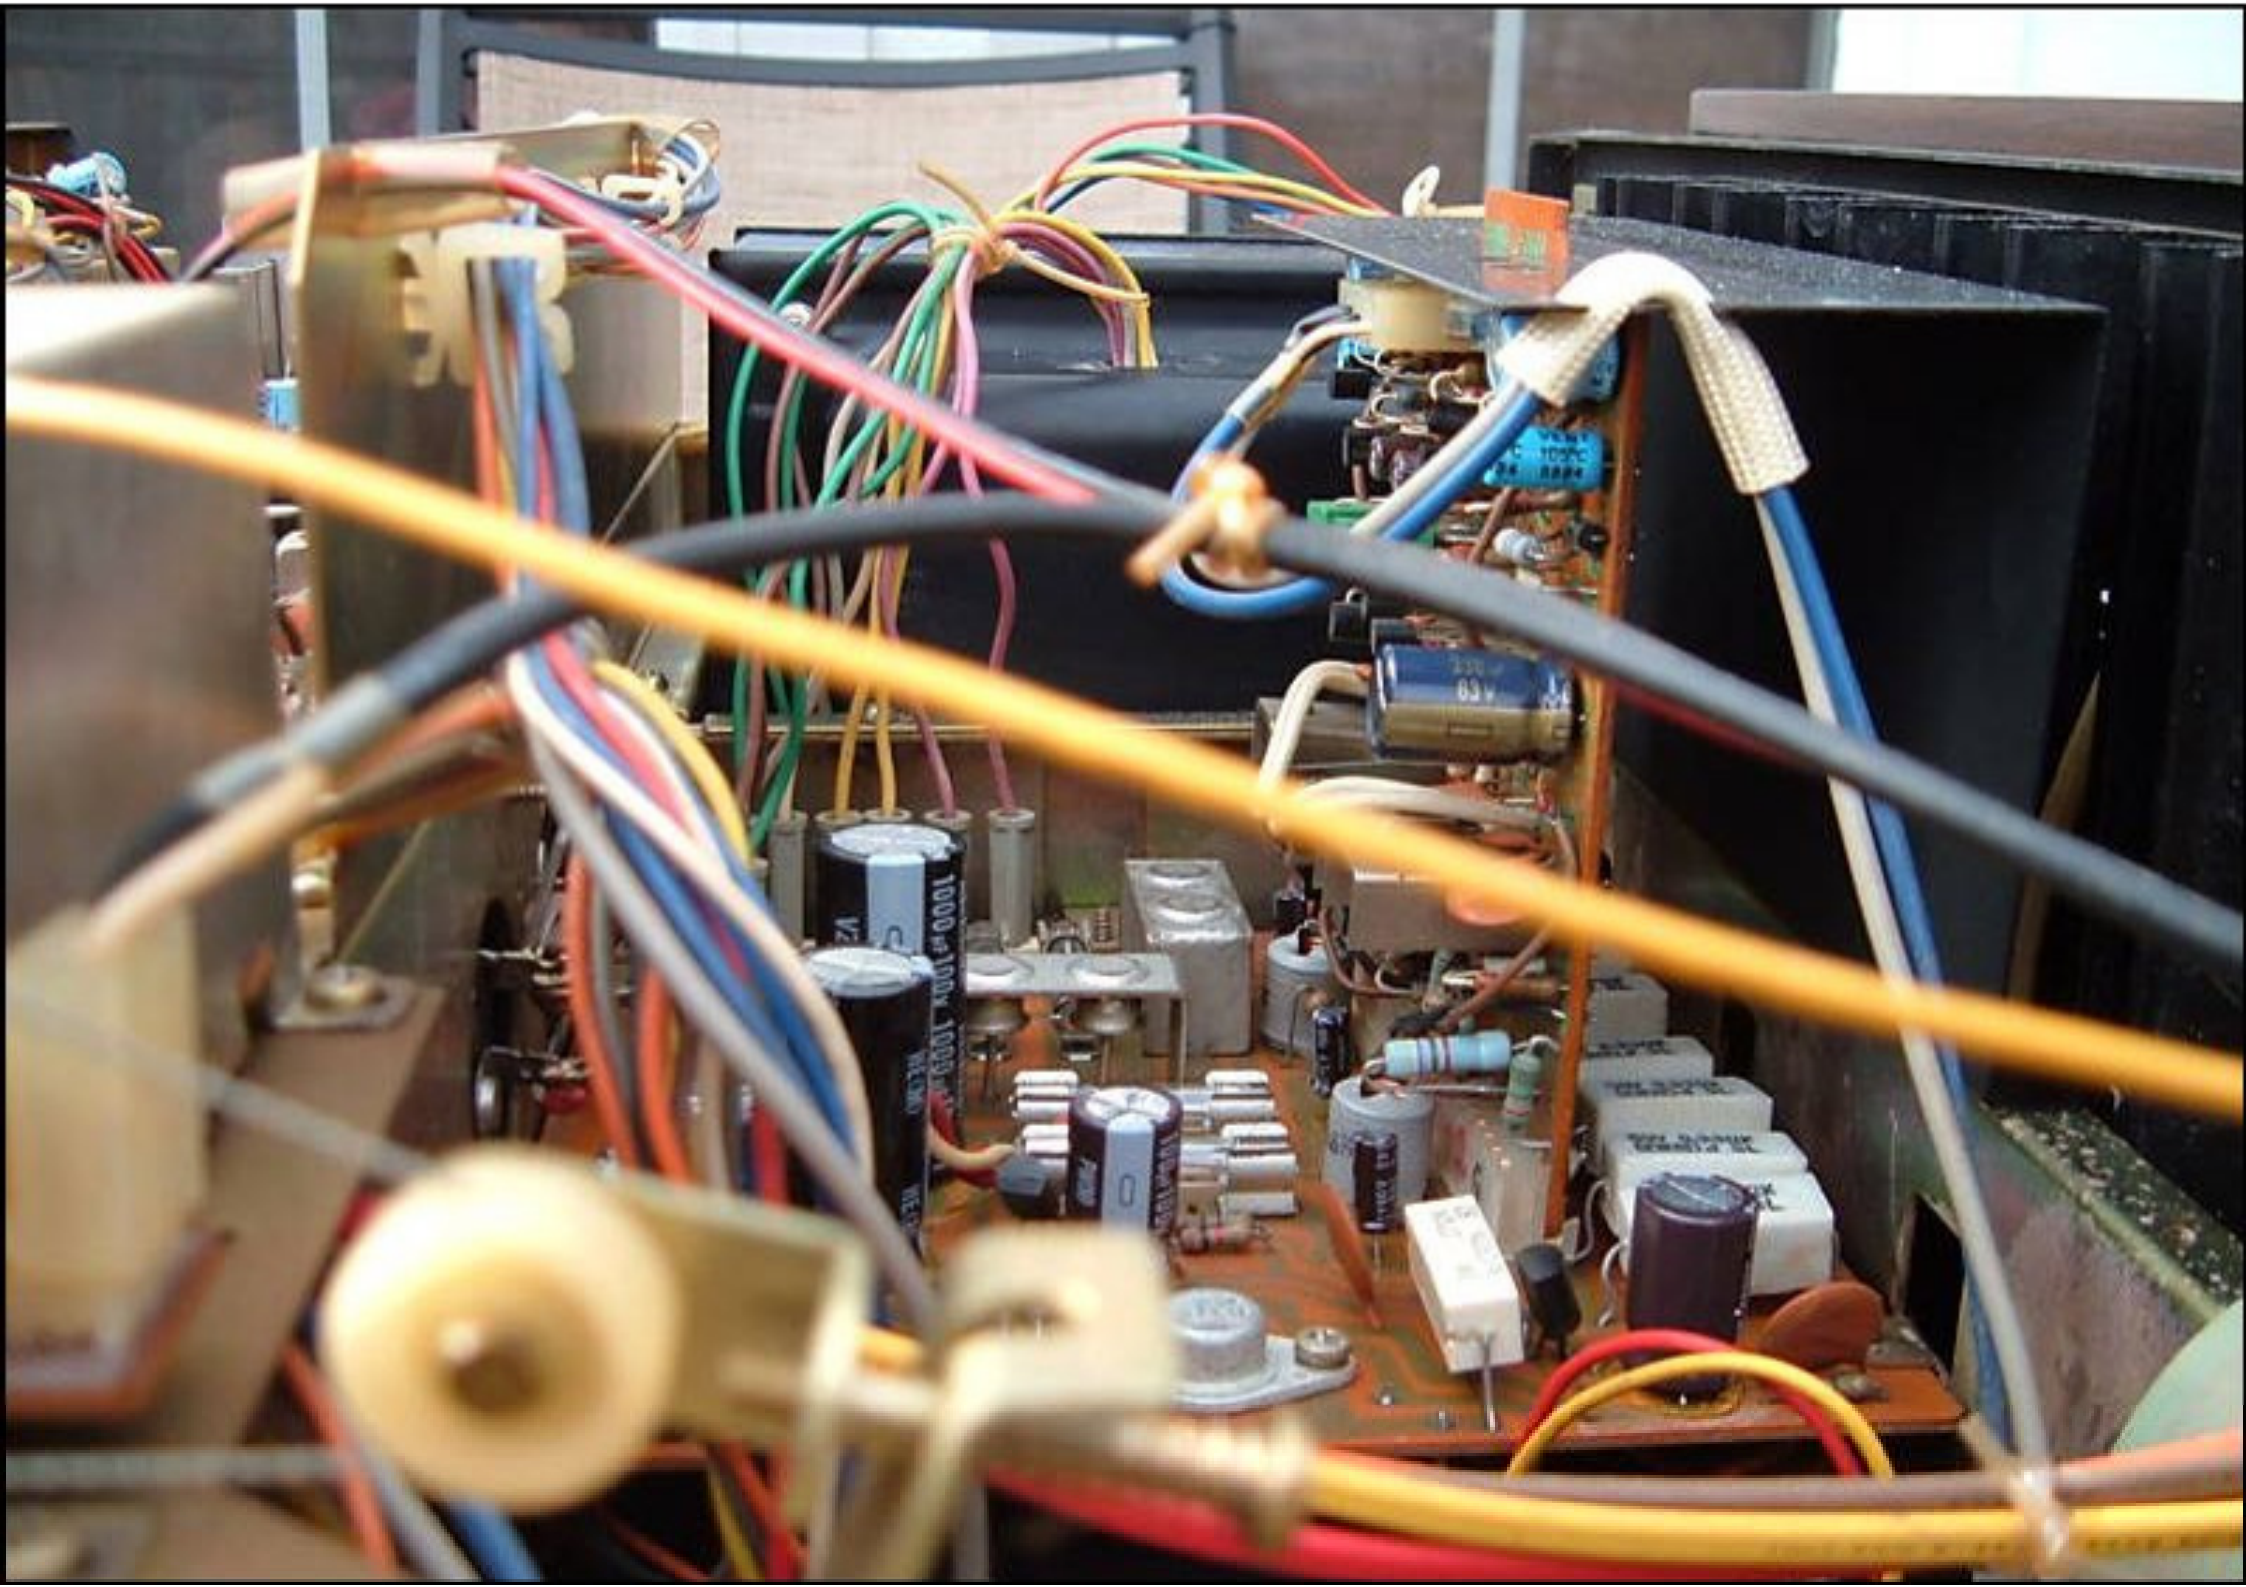

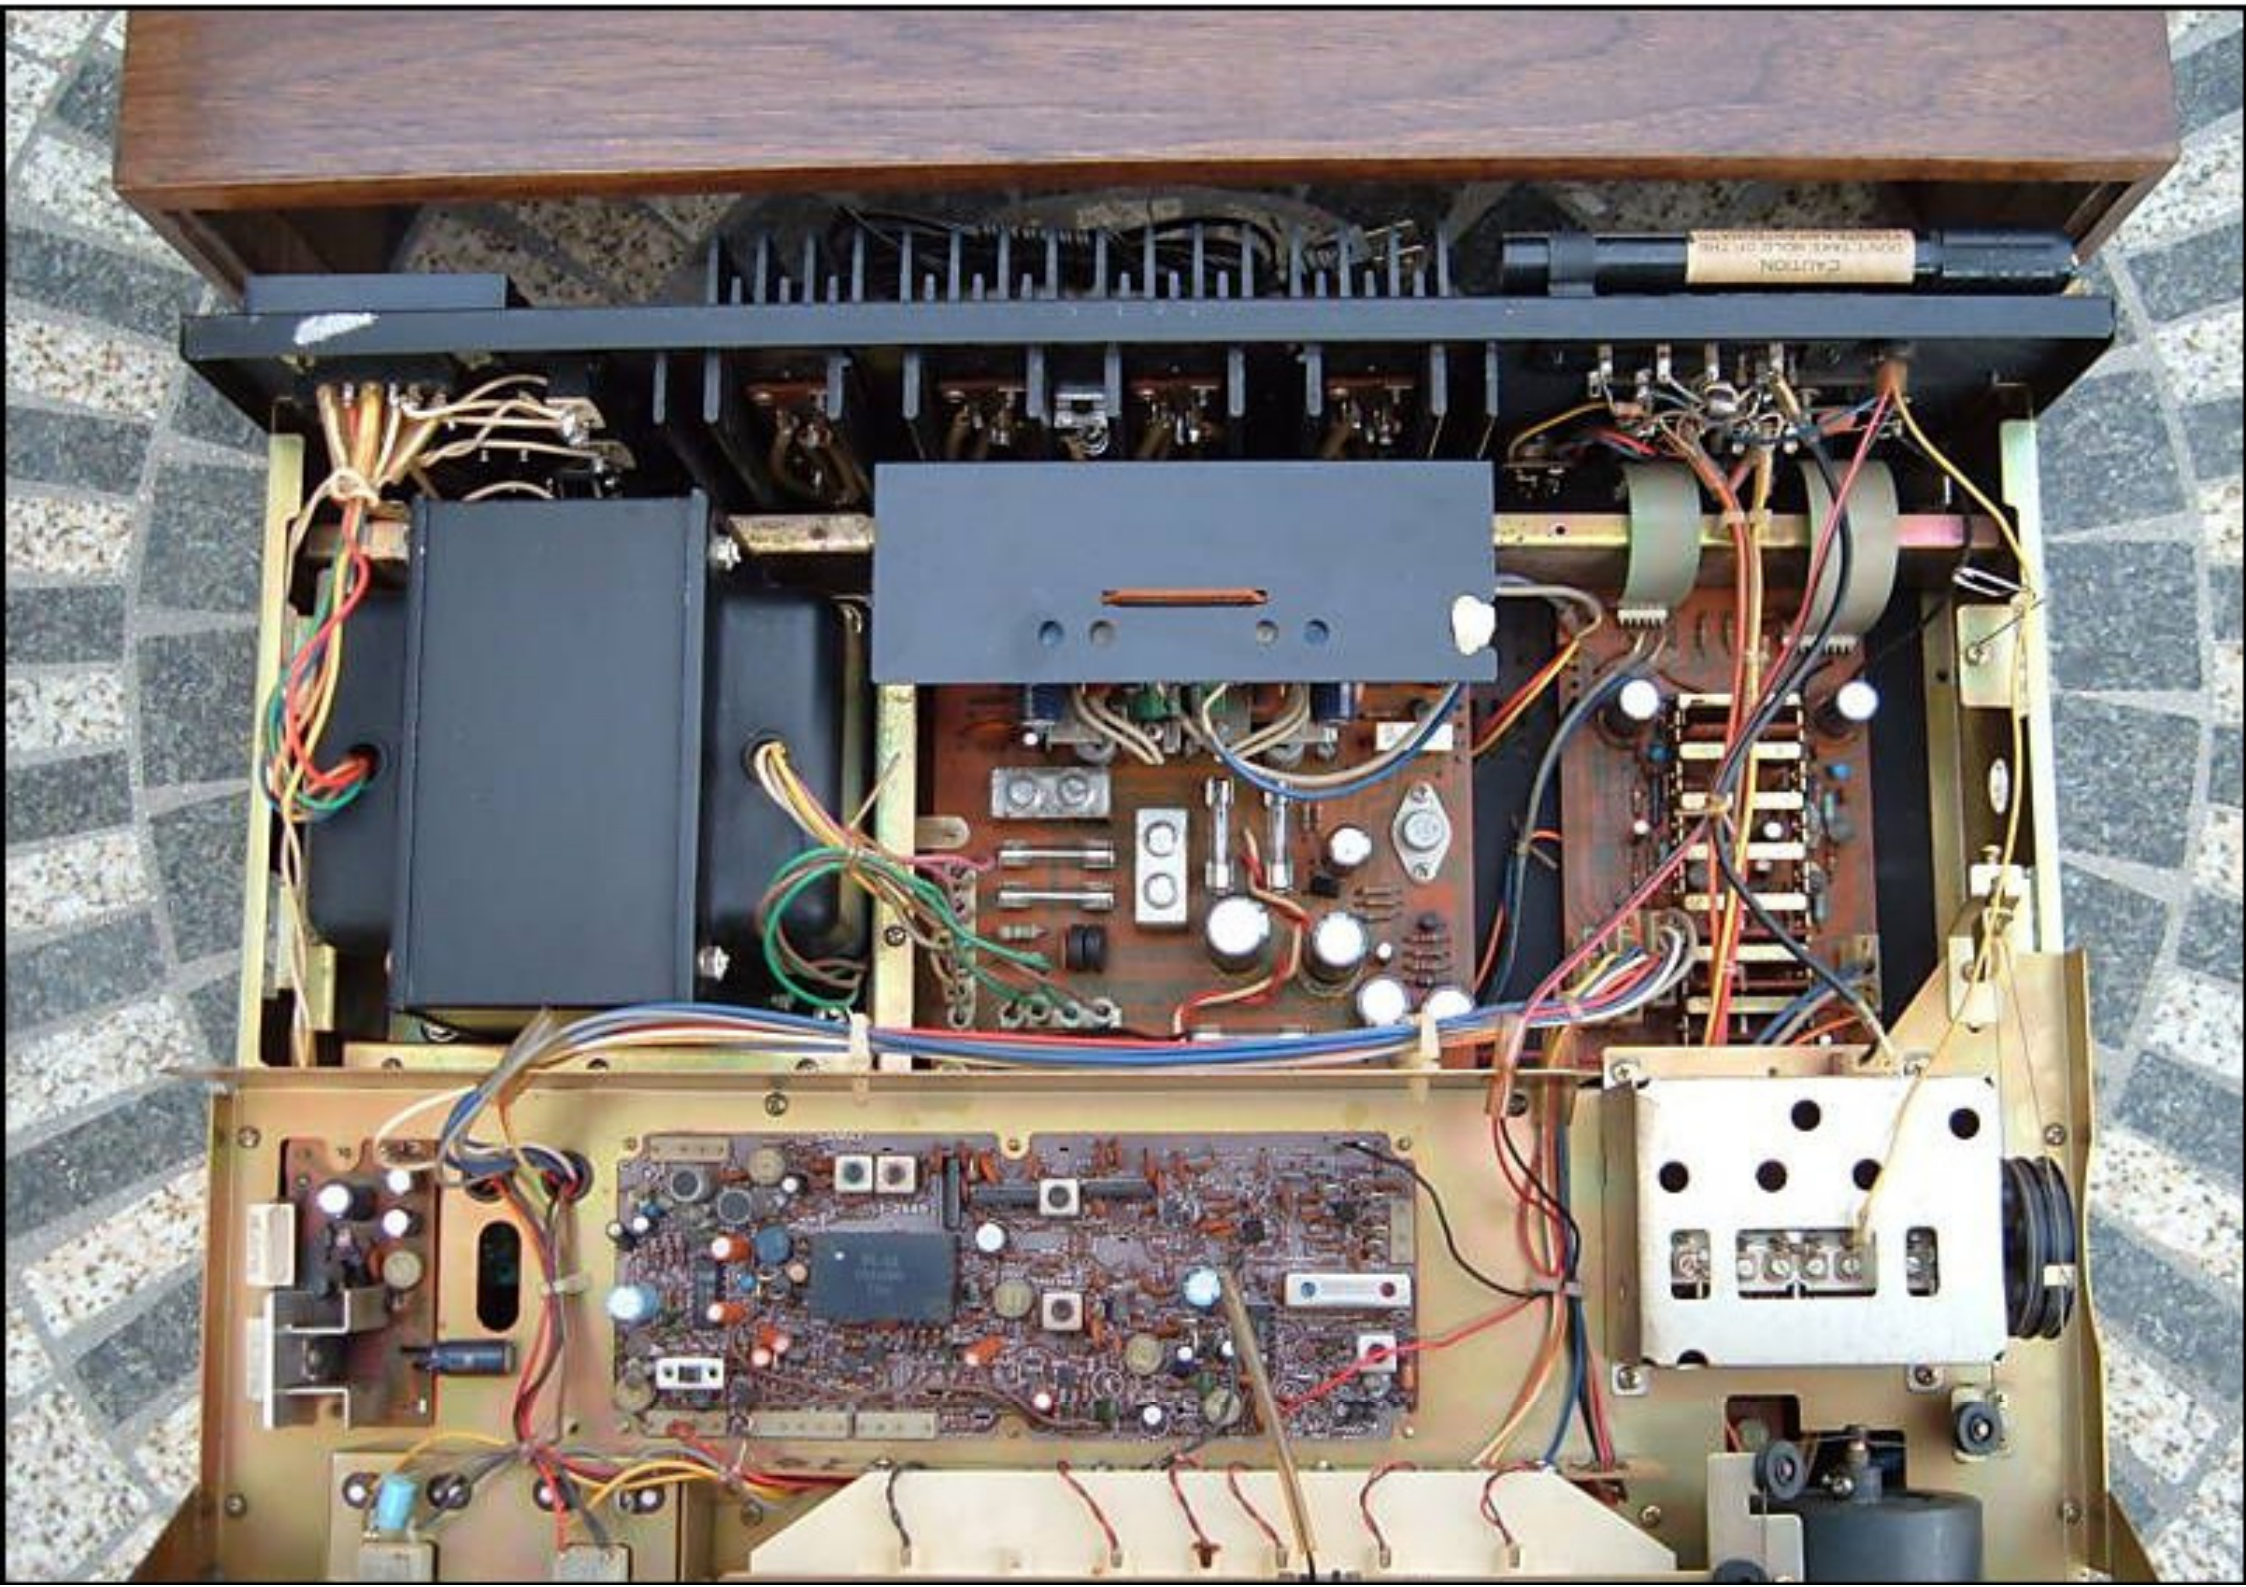

receiver 9090DB



POWER PROTECTOR

FILTERS LOW HIGH

AUDIO MUTING -90dB

LEFT RIGHT

LOUDNESS MONO FM AUTO (OFF) TAPE MONITOR METER REC. Exp. Time



PHONES

BASS MIDRANGE TREBLE

TRIPLE TONE CONTROL

VOLUME BALANCE

DOLBY NR

EXLBY SYSTEM