


M120A


**BLOCK DIAGRAMME**

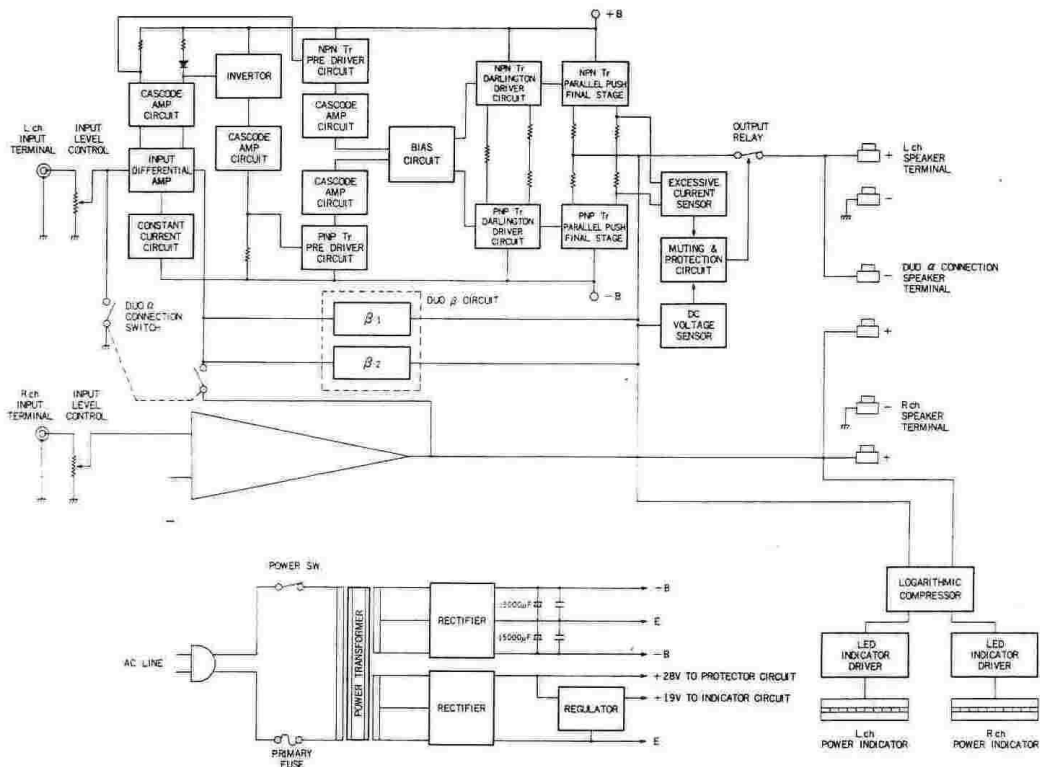

**SPECIFICATIONS**

<b>Power Output:</b>	120 watts minimum continuous per channel, both channels driven into 8 ohms load, at any frequency from 20Hz to 20,000Hz with no more than 0.015% total harmonic distortion.
<b>Duo-Alpha Connection Output:</b>	300 watts into 8 ohms load with no more than 0.03% total harmonic distortion.
<b>Rated I.M.:</b>	no more than 0.01% (8 ohms, 120W/ch, 60Hz : 7kHz = 4 : 1)
<b>Input Sensitivity:</b>	900 mV
<b>Input Impedance:</b>	160K ohms
<b>Signal-to-Noise Ratio:</b>	better than 110 dB (IHF-A weighted, input short-circuited)
<b>Frequency Response:</b>	10 Hz - 100,000Hz (within -1 dB)
<b>Damping Factor:</b>	50
<b>Additional Features:</b>	Power Indicator, Power Indicator Sensitivity Selector (full, off, 1/100), Speaker Selector, Input Level Set, Headphone Jack, Selector for Duo-Alpha Connection.
<b>Power Consumption:</b>	120V 5A 480W (120W, 8 ohms load)
<b>Dimensions:</b>	464(W) x 336(D) x 176(H) mm wooden case (18-1/4" x 13-7/32" x 6-15/16") 438(W) x 336(D) x 141(H) mm metal cabinet (17-1/4" x 13-7/32" x 5-9/16")
<b>Weight:</b>	Net 13.8 kgs (30.4 lbs.) wooden case Gross 15.3 kgs (33.7 lbs.) Net 14.2 kgs (31.2 lbs.) metal cabinet Gross 15.7 kgs (34.5 lbs.)

Specifications and appearance design subject to change without notices.

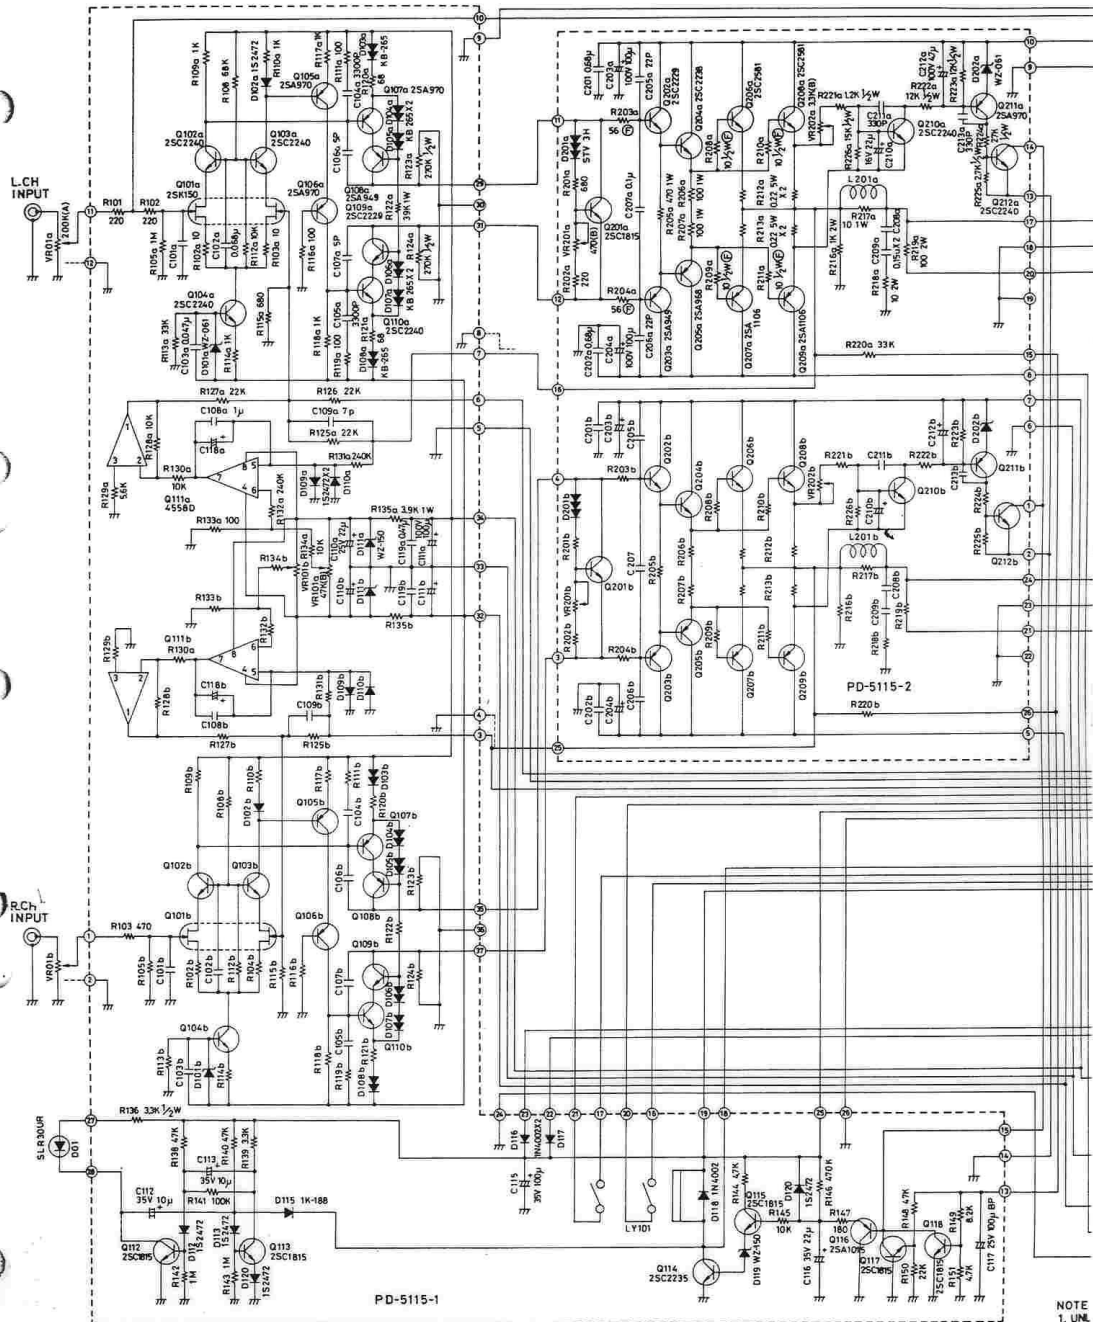

PD-5115-1

NOTE  
 1. UNL.  
 ALL  
 2. TRA  
 CON  
 3. OUR  
 THE

