


8. SCHEMATIC DIAGRAM

8-1. AU-3900

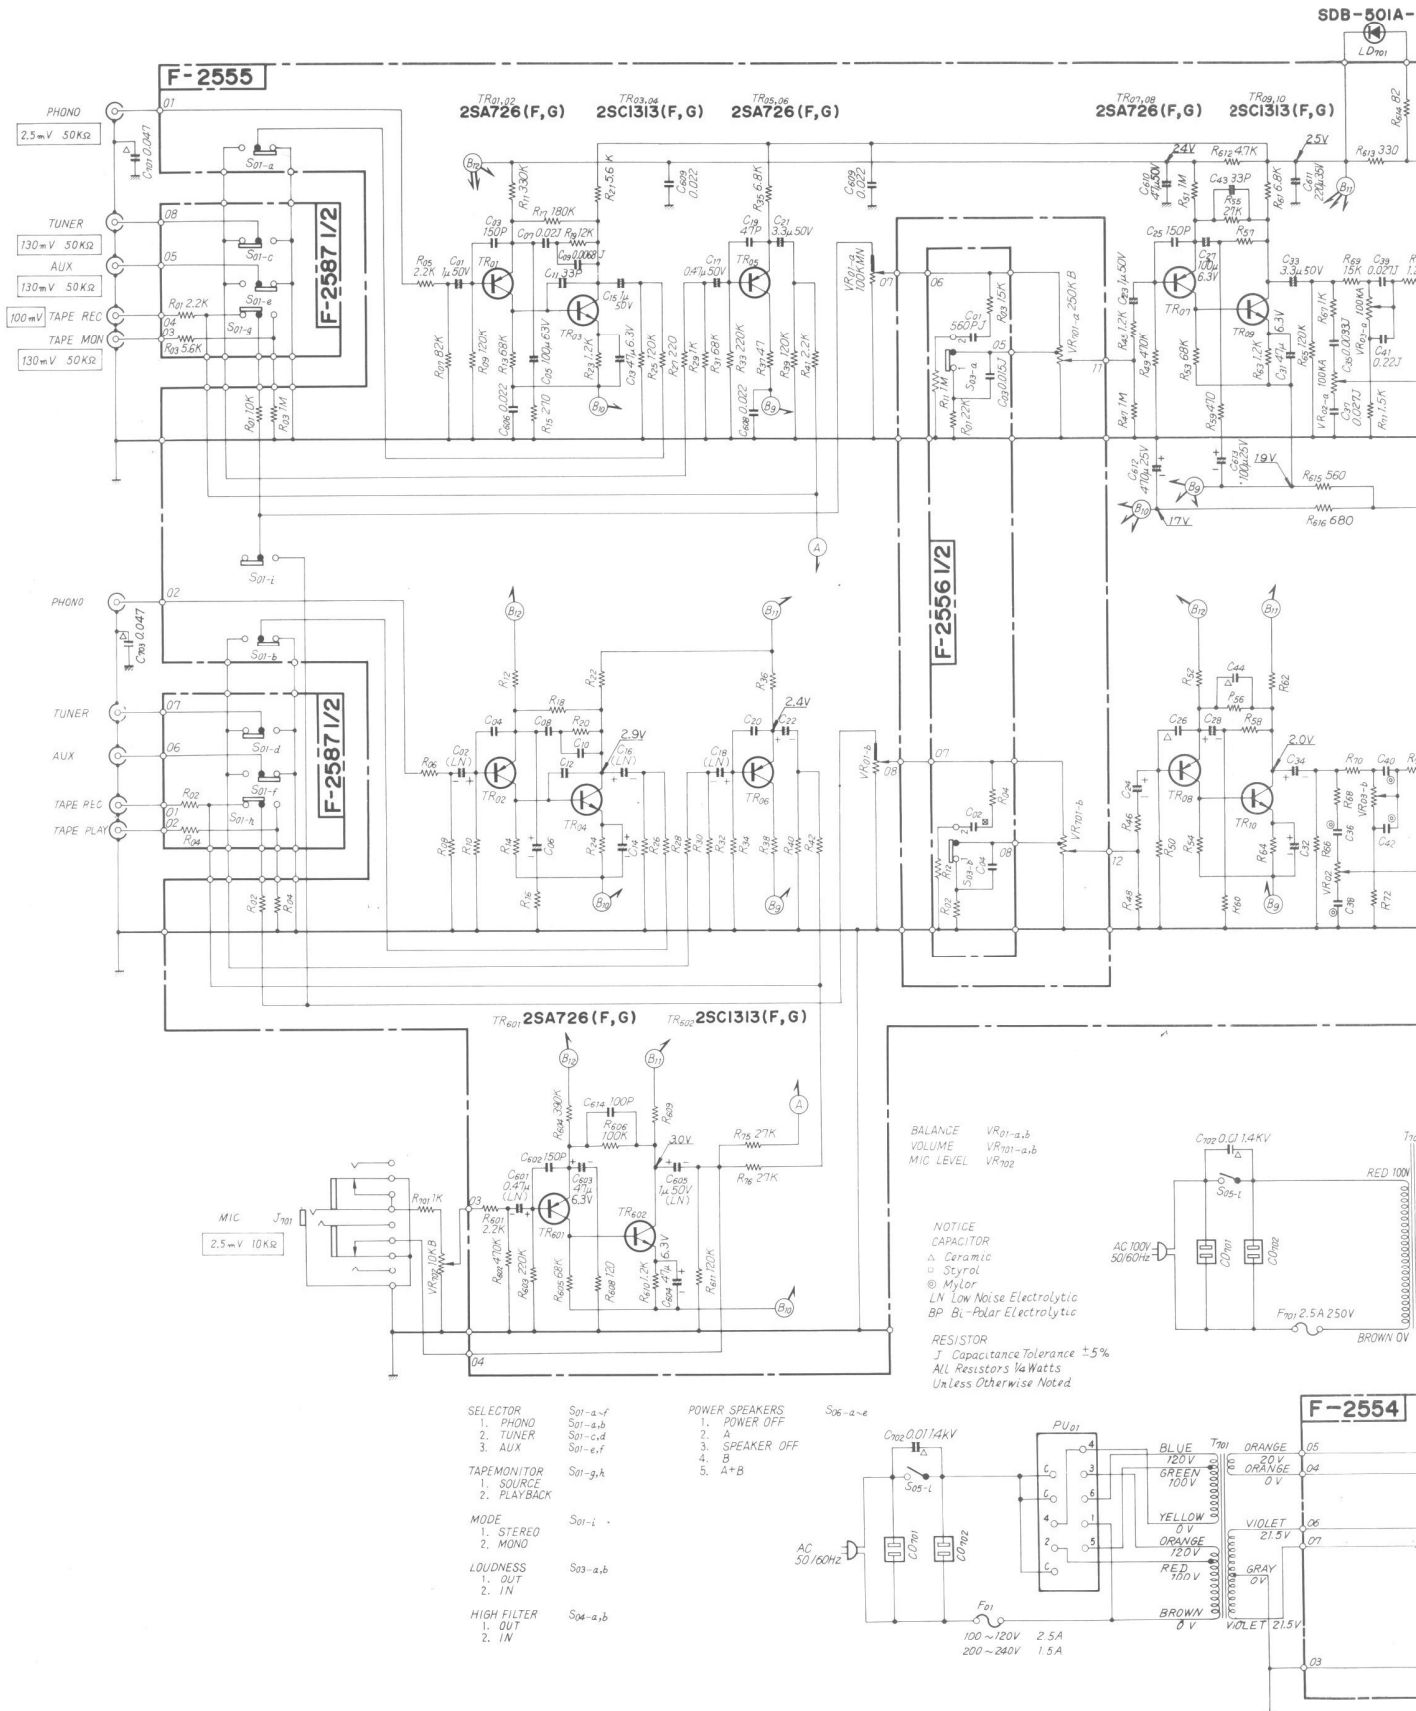

- SELECTOR S01-a-f
1. PHONO S01-a,b
2. TUNER S01-c,d
3. AUX S01-e,f
- TAPE MONITOR S01-g,h
1. SOURCE S01-g
2. PLAYBACK S01-h
- MODE S01-i
1. STEREO S01-i
2. MONO S01-j
- LOUDNESS S03-a,b
1. OUT S03-a
2. IN S03-b
- HIGH FILTER S04-a,b
1. OUT S04-a
2. IN S04-b

- POWER SPEAKERS S06-a-e
1. POWER OFF S06-a
2. SPEAKER OFF S06-b
3. A S06-c
4. B S06-d
5. A+B S06-e

- BALANCE VR01-a,b
- VOLUME VR01-a,b
- MIC LEVEL VR02

NOTICE

CAPACITOR

△ Ceramic

□ Styrol

○ Mylor

LN Low Noise Electrolytic

BP Bi-Polar Electrolytic

RESISTOR

J Capacitance Tolerance ±5%

ALL Resistors 1/4 Watts

Unless Otherwise Noted

* La présentation et les spécifications sont susceptibles d'être modifiées sans préavis par suite d'améliorations éventuelles.
 * Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten.
 * Design and specification subject to change without notice for improvements.

