



# Philco Model 96

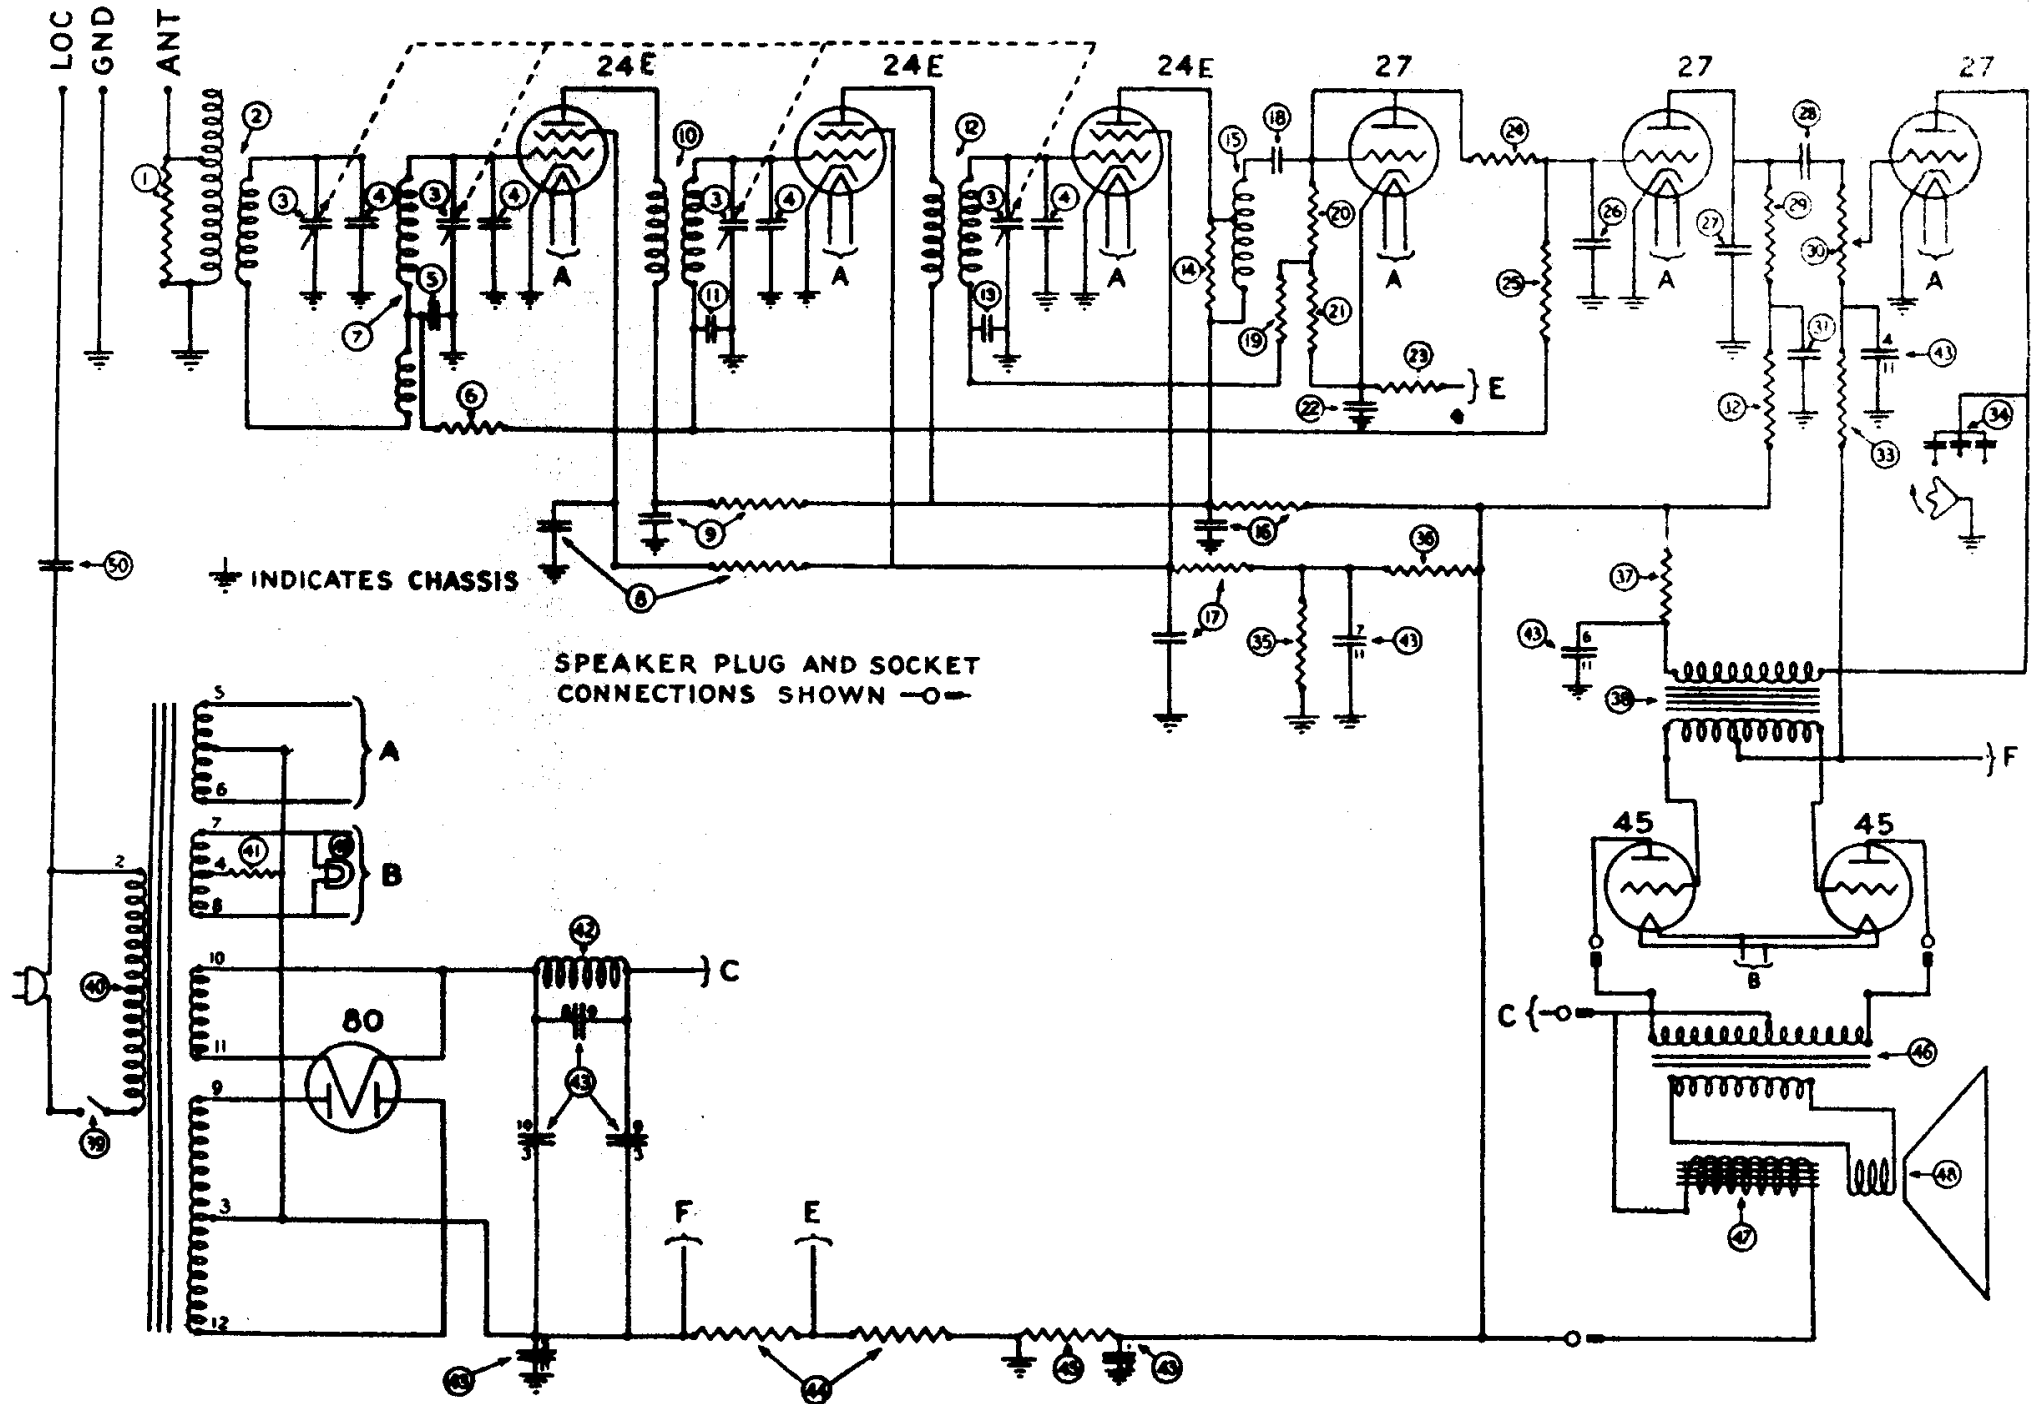

Philco Model 96

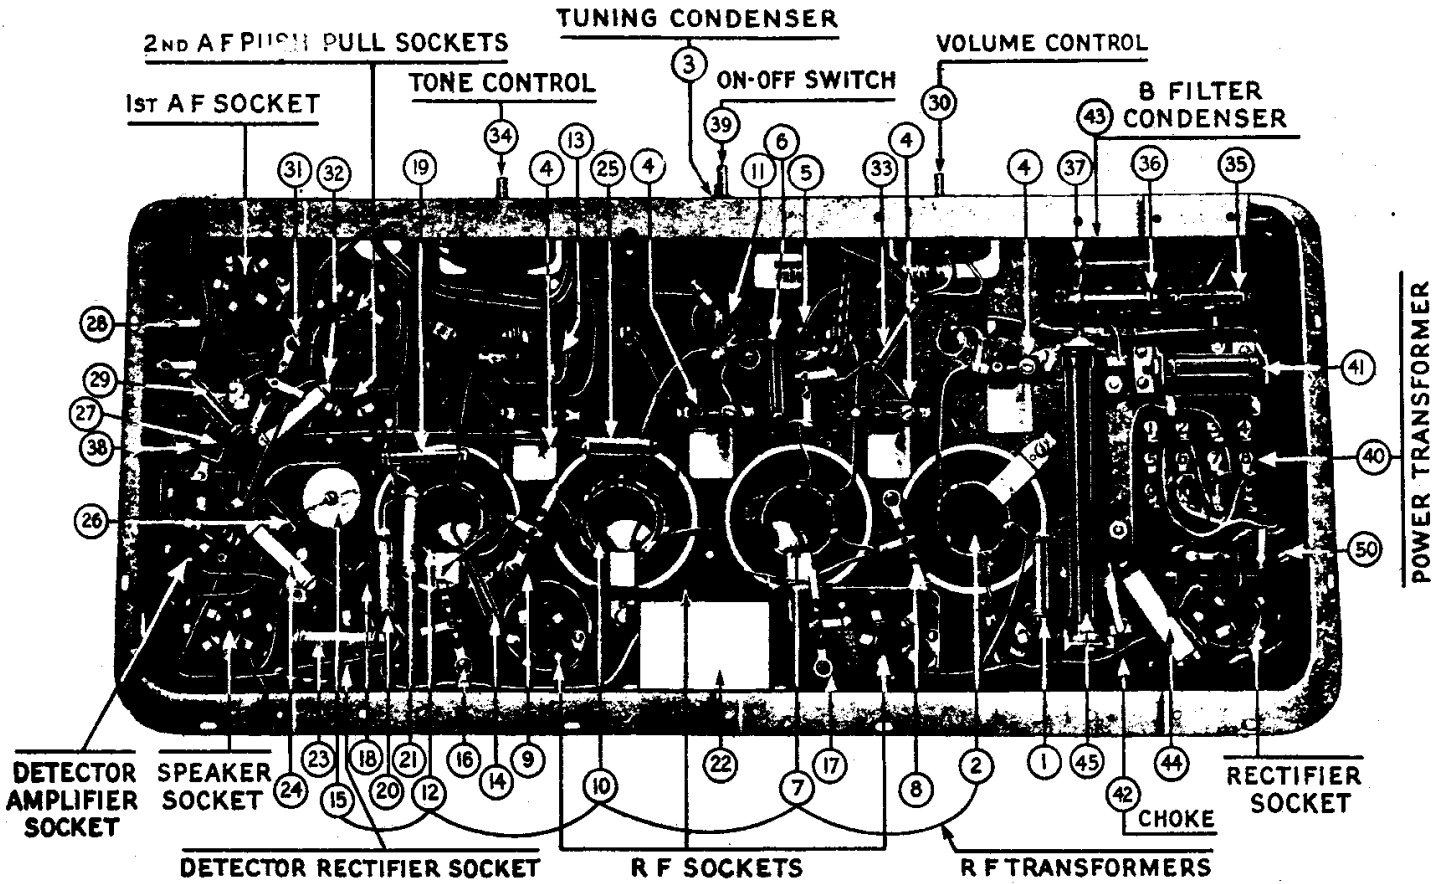

Replacement Parts for Model 96

No.	Description	Part No.	No.	Description	Part No.
1	Antenna Resistor	3526	30	Volume Control	4093
2	First R. F. Transformer	3744-A	31	By-Pass Condenser	3615-D
3	Tuning Condenser	4000-D	32	Resistor	3768
4	Compensating Condenser	3772-A	33	Resistor	3542
5	By-Pass Condenser	3615-F	34	Tone Control	4037-A
6	Resistor	3542	35	Resistor	3542
7	Second R. F. Transformer	3744-B	36	Resistor	3766
8	By-Pass Condenser and Resistor	3615-C	37	Resistor	3656
9	By-Pass Condenser and Resistor	3615-B	38	Input Transformer	3537
10	Third R. F. Transformer	3744-C	39	On-Off Switch	4095
11	By-Pass Condenser	3615-E	40	Power Transformer (60 Cycle)	3752
12	Fourth R. F. Transformer	3744-C	41	Power Transformer (25 Cycle)	3753
13	By-Pass Condenser	3615-E	42	C Resistor	3763
14	Resistor	3766	43	Choke	3422
15	Fifth R. F. Transformer	3775-B	44	Filter Condenser (60 Cycle)	3754
16	By-Pass Condenser and Resistor	3615-B	45	Filter Condenser (25 Cycle)	3755
17	By-Pass Condenser and Resistor	3615-C	46	Resistor	3764
18	Condenser	3774	47	B Resistor	3762
19	Resistor	3769	48	Out-Put Transformer	2848
20	Resistor	3767	49	Field Coil	2850
21	Resistor	3767	50	Voice Coil and Cone	2794-B
22	By-Pass Condenser	3583		Pilot Lamp	3463
23	Resistor	3767		Condenser (LOC)	3793-B
24	Resistor	3768		Knob (Vol. Control)	3579
25	Resistor	3769		Knob (Tuning Condenser)	3580
26	By-Pass Condenser	3082		Dial Indicator	4006
27	By-Pass Condenser	3082		Scale	4118
28	Condenser	3753-C		Speaker Plug and Cable (Short)	L-1101-A
29	Resistor	3769		Speaker Plug and Cable (Long)	L-1102-A
30					

NOTE: The first two Compensating Condensers (4) are 3772-A; the third and fourth Condensers are 3968-A.