


DIAGRAM OF CONNECTIONS RECEIVERS TYPE 23 & 23A

33

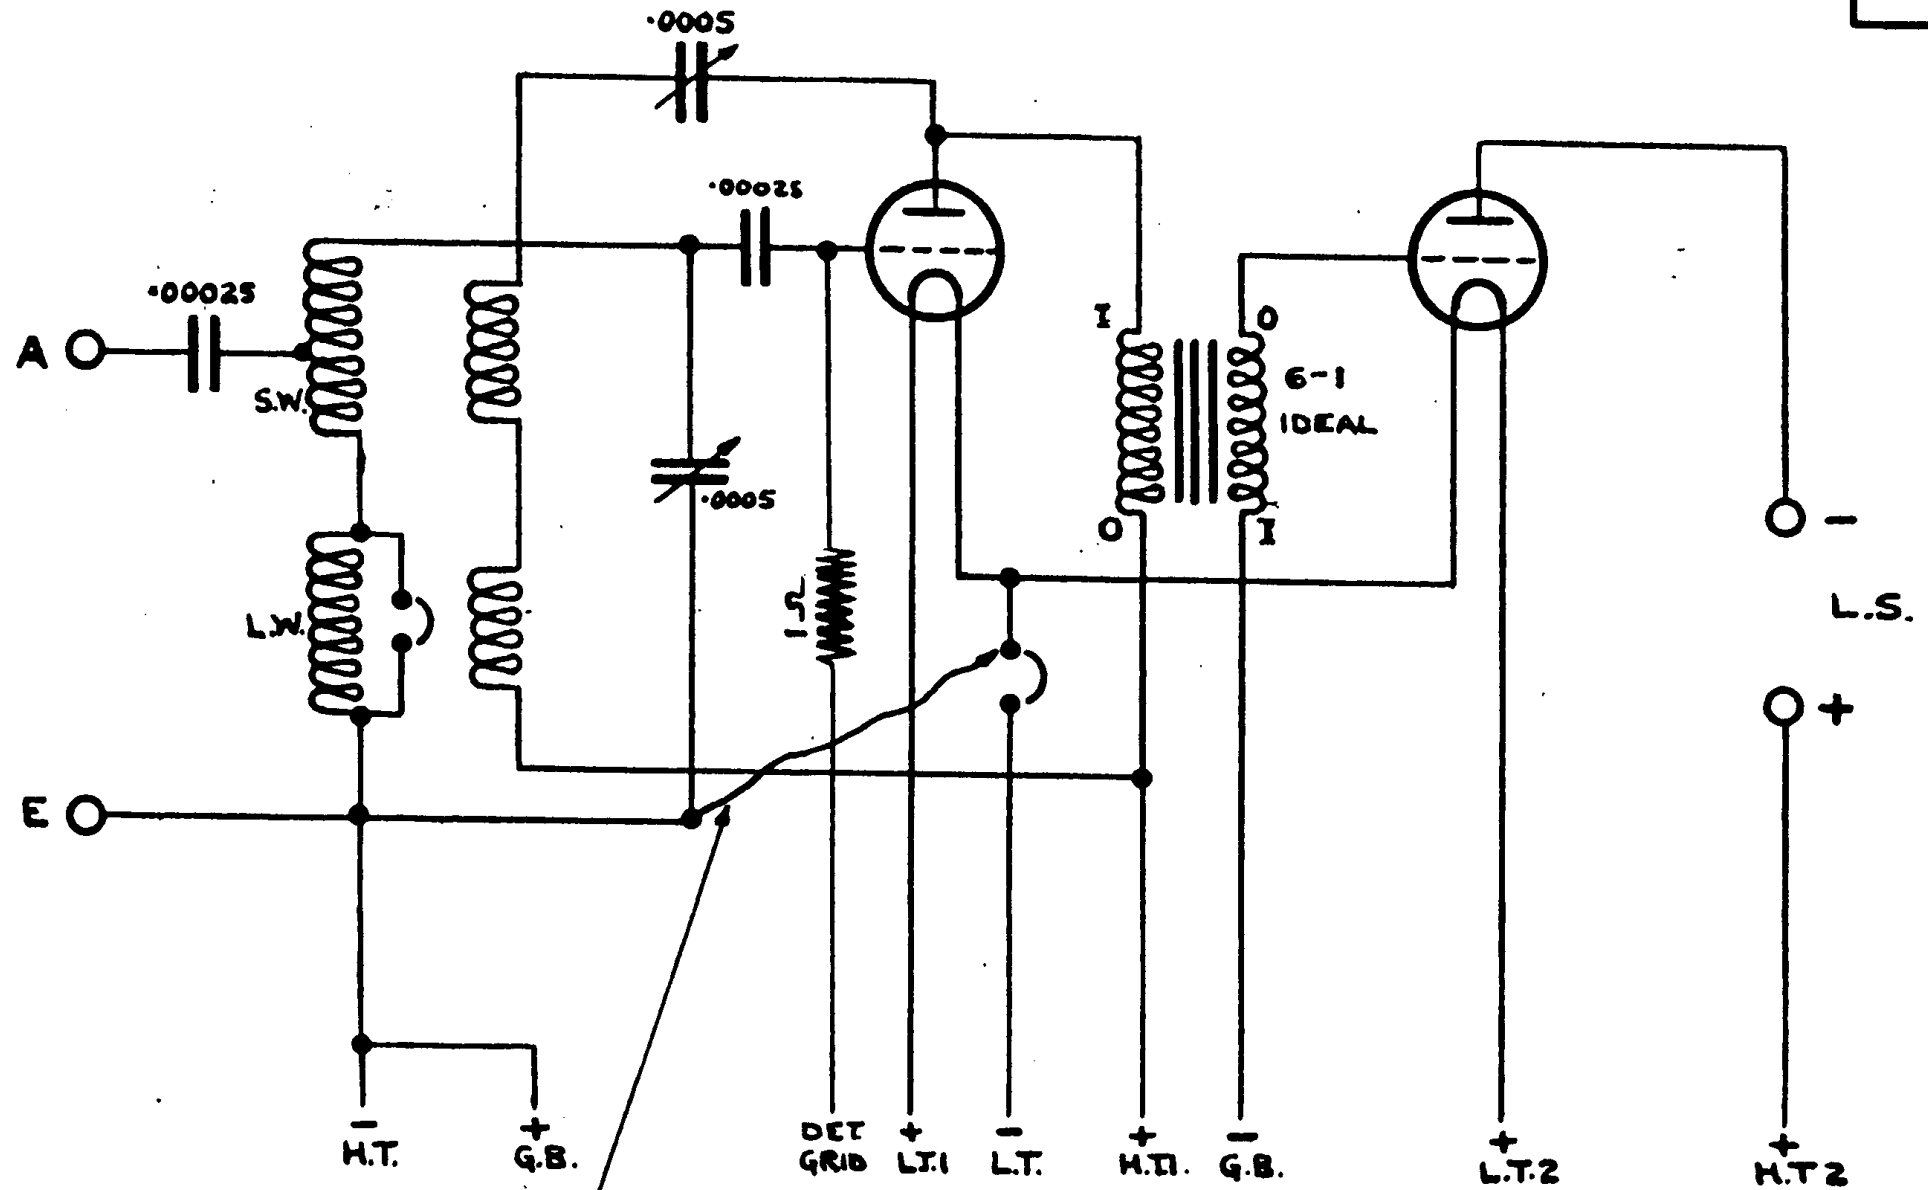

FLEX. LEAD CONNECTED TO SWITCH SPRING FOR BATTERY AND D.C.
AND CONNECTED TO DETECTOR KATHODE ON A.C.