

REGENTONE

Model D15

General Description : Four-valve (including rectifier), two-waveband, bedside-table receiver with built-in ferrite-rod aerial.


Power Supplies : A.C./D.C. mains, 200–250 volts (two voltage adjustment positions).

Valves : (V1) UCH81; (V2) UBF80; (V3) UCL83; (V4) UY85.

Intermediate Frequency : 470 kc/s.

C1 C2 C3 C4 C5 C6 C7 C8 C9 C10 C11 C12 C13 C14 C15 C16 EC1 C17 C18 C19 C20 C21 C22 C23 C24 EC2 C25 C26 CONDENSERS

R1 R2 R3 R4 R5 R6 R7 R8 R9 R10 R11 R12 R13 R14 R15 RESISTORS

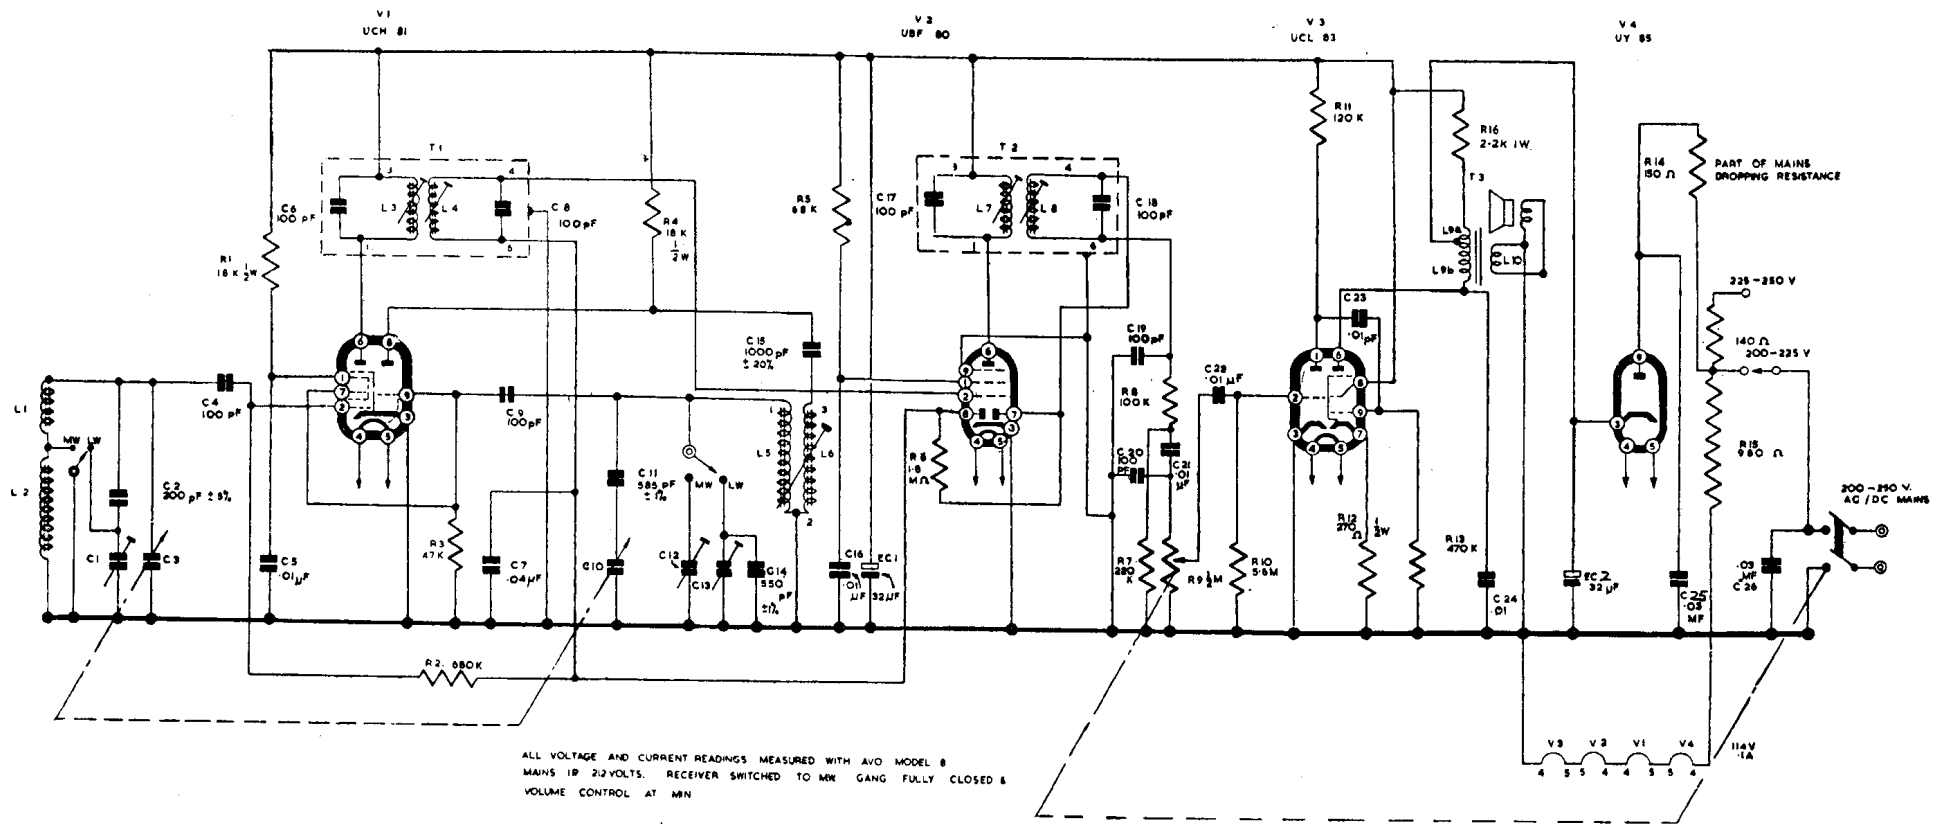

ALL VOLTAGE AND CURRENT READINGS MEASURED WITH AVO MODEL 8 MAINS IP 210 VOLTS. RECEIVER SWITCHED TO MW GANG FULLY CLOSED & VOLUME CONTROL AT MIN
 ALL RESISTORS ARE 1/8 WATT UNLESS OTHERWISE STATED

CIRCUIT DIAGRAM—REGENTONE MODEL D15

REGENTONE