


REGENTONE

Model SRG25

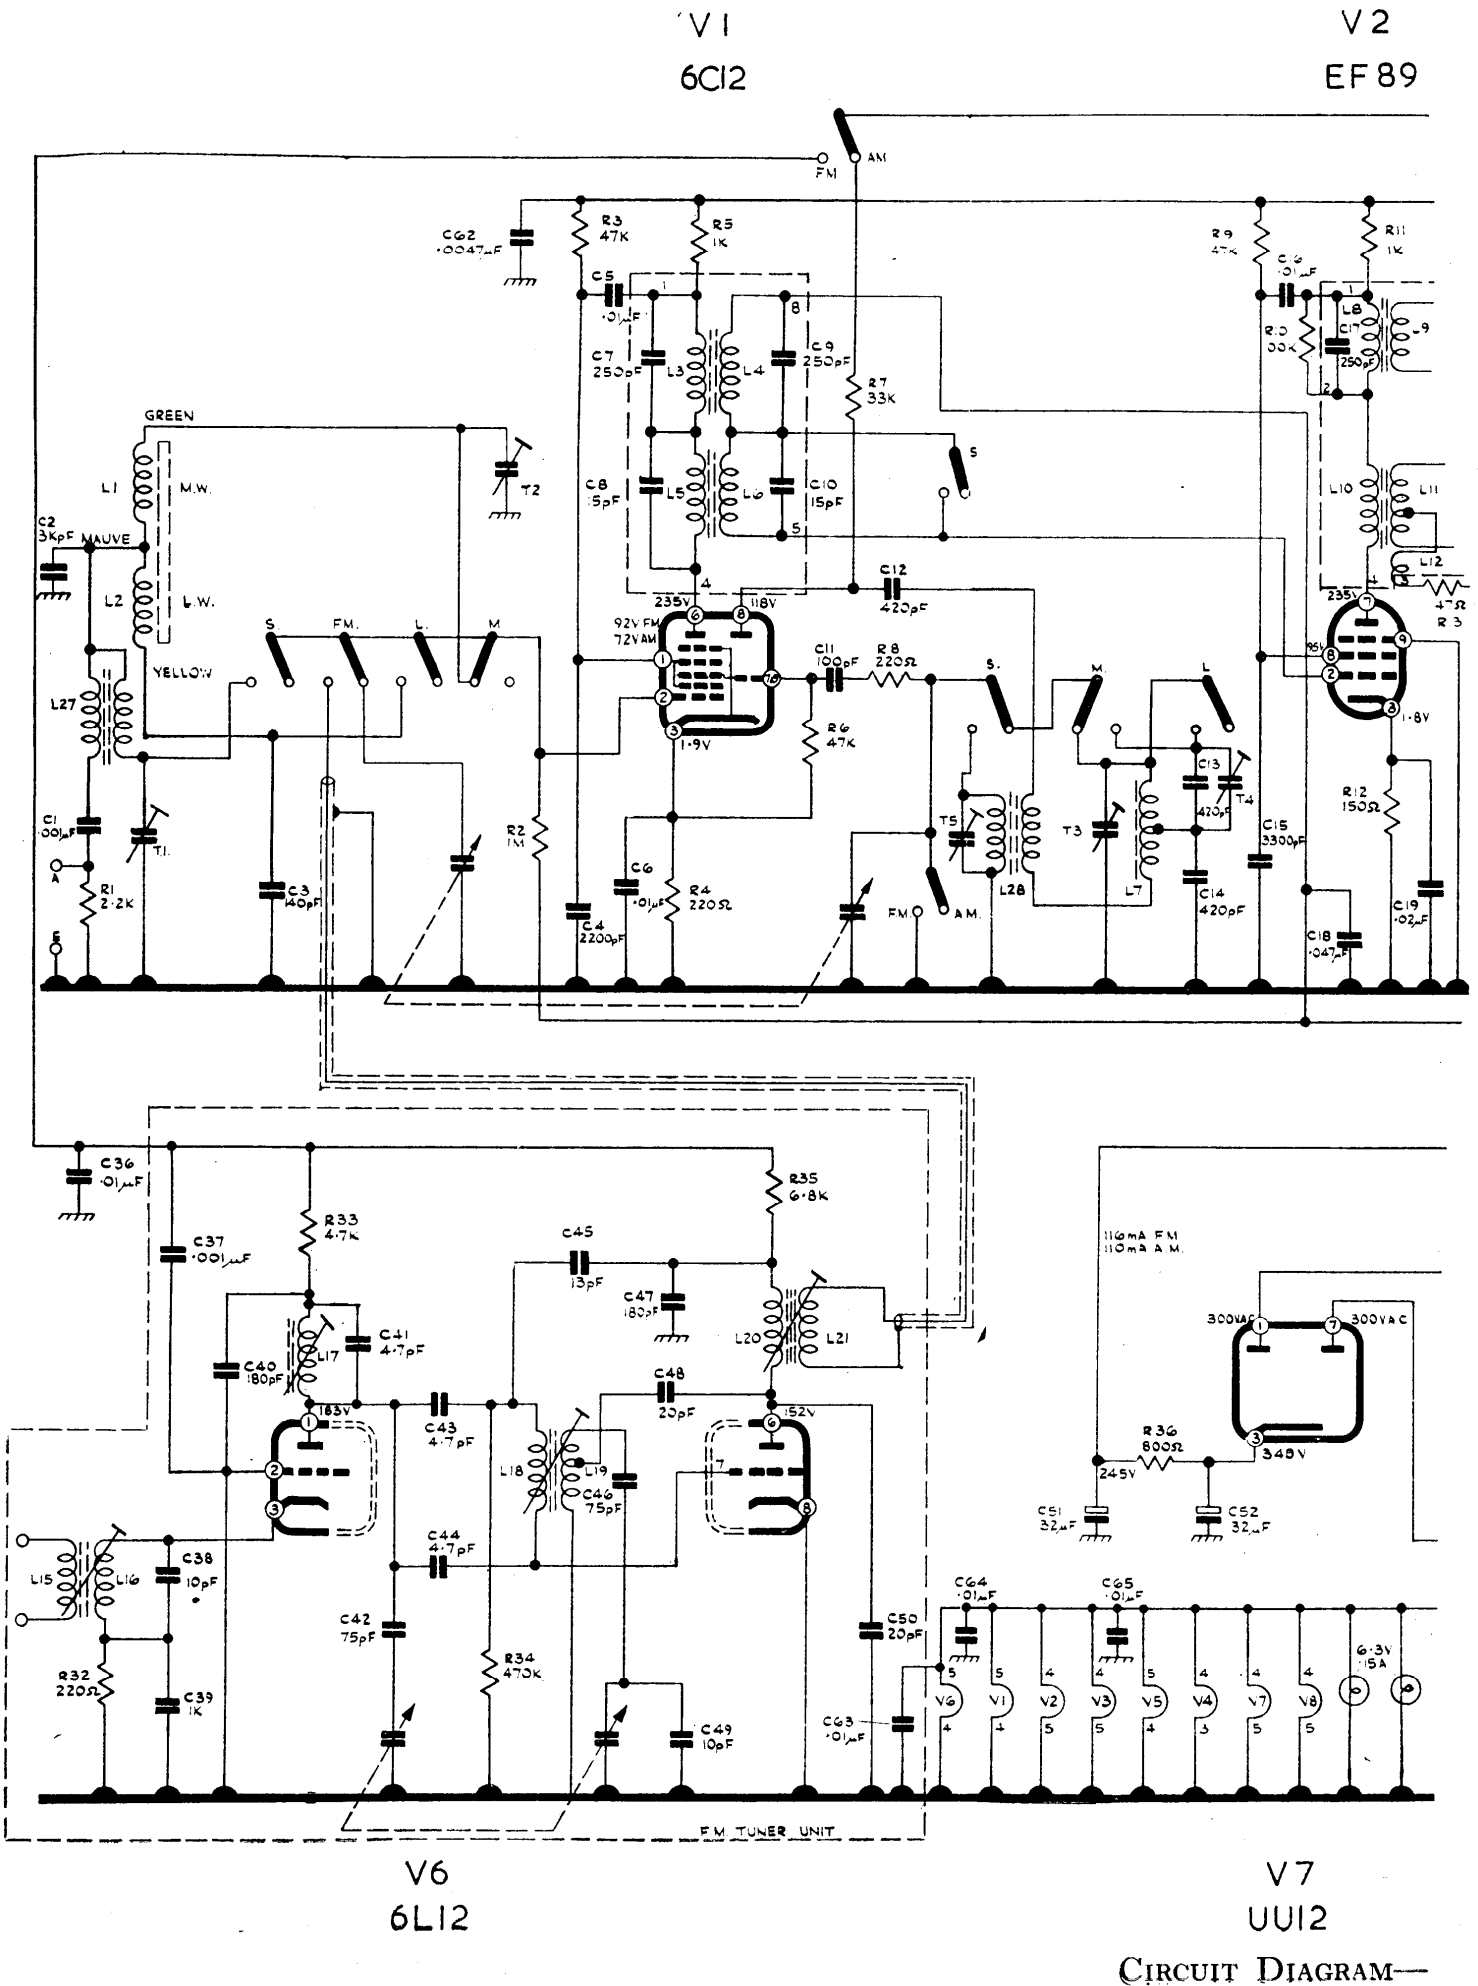


V6
6LI2


V7
UUI2

CIRCUIT DIAGRAM—

General Description: Nine-valve (including tuning indicator and rectifier), four-waveband, A.M./F.M. stereogram with B.S.R. type UA16 or UA15 record changer for use on A.C. mains, 200-250 volts, 50 c/s., 80 watts.

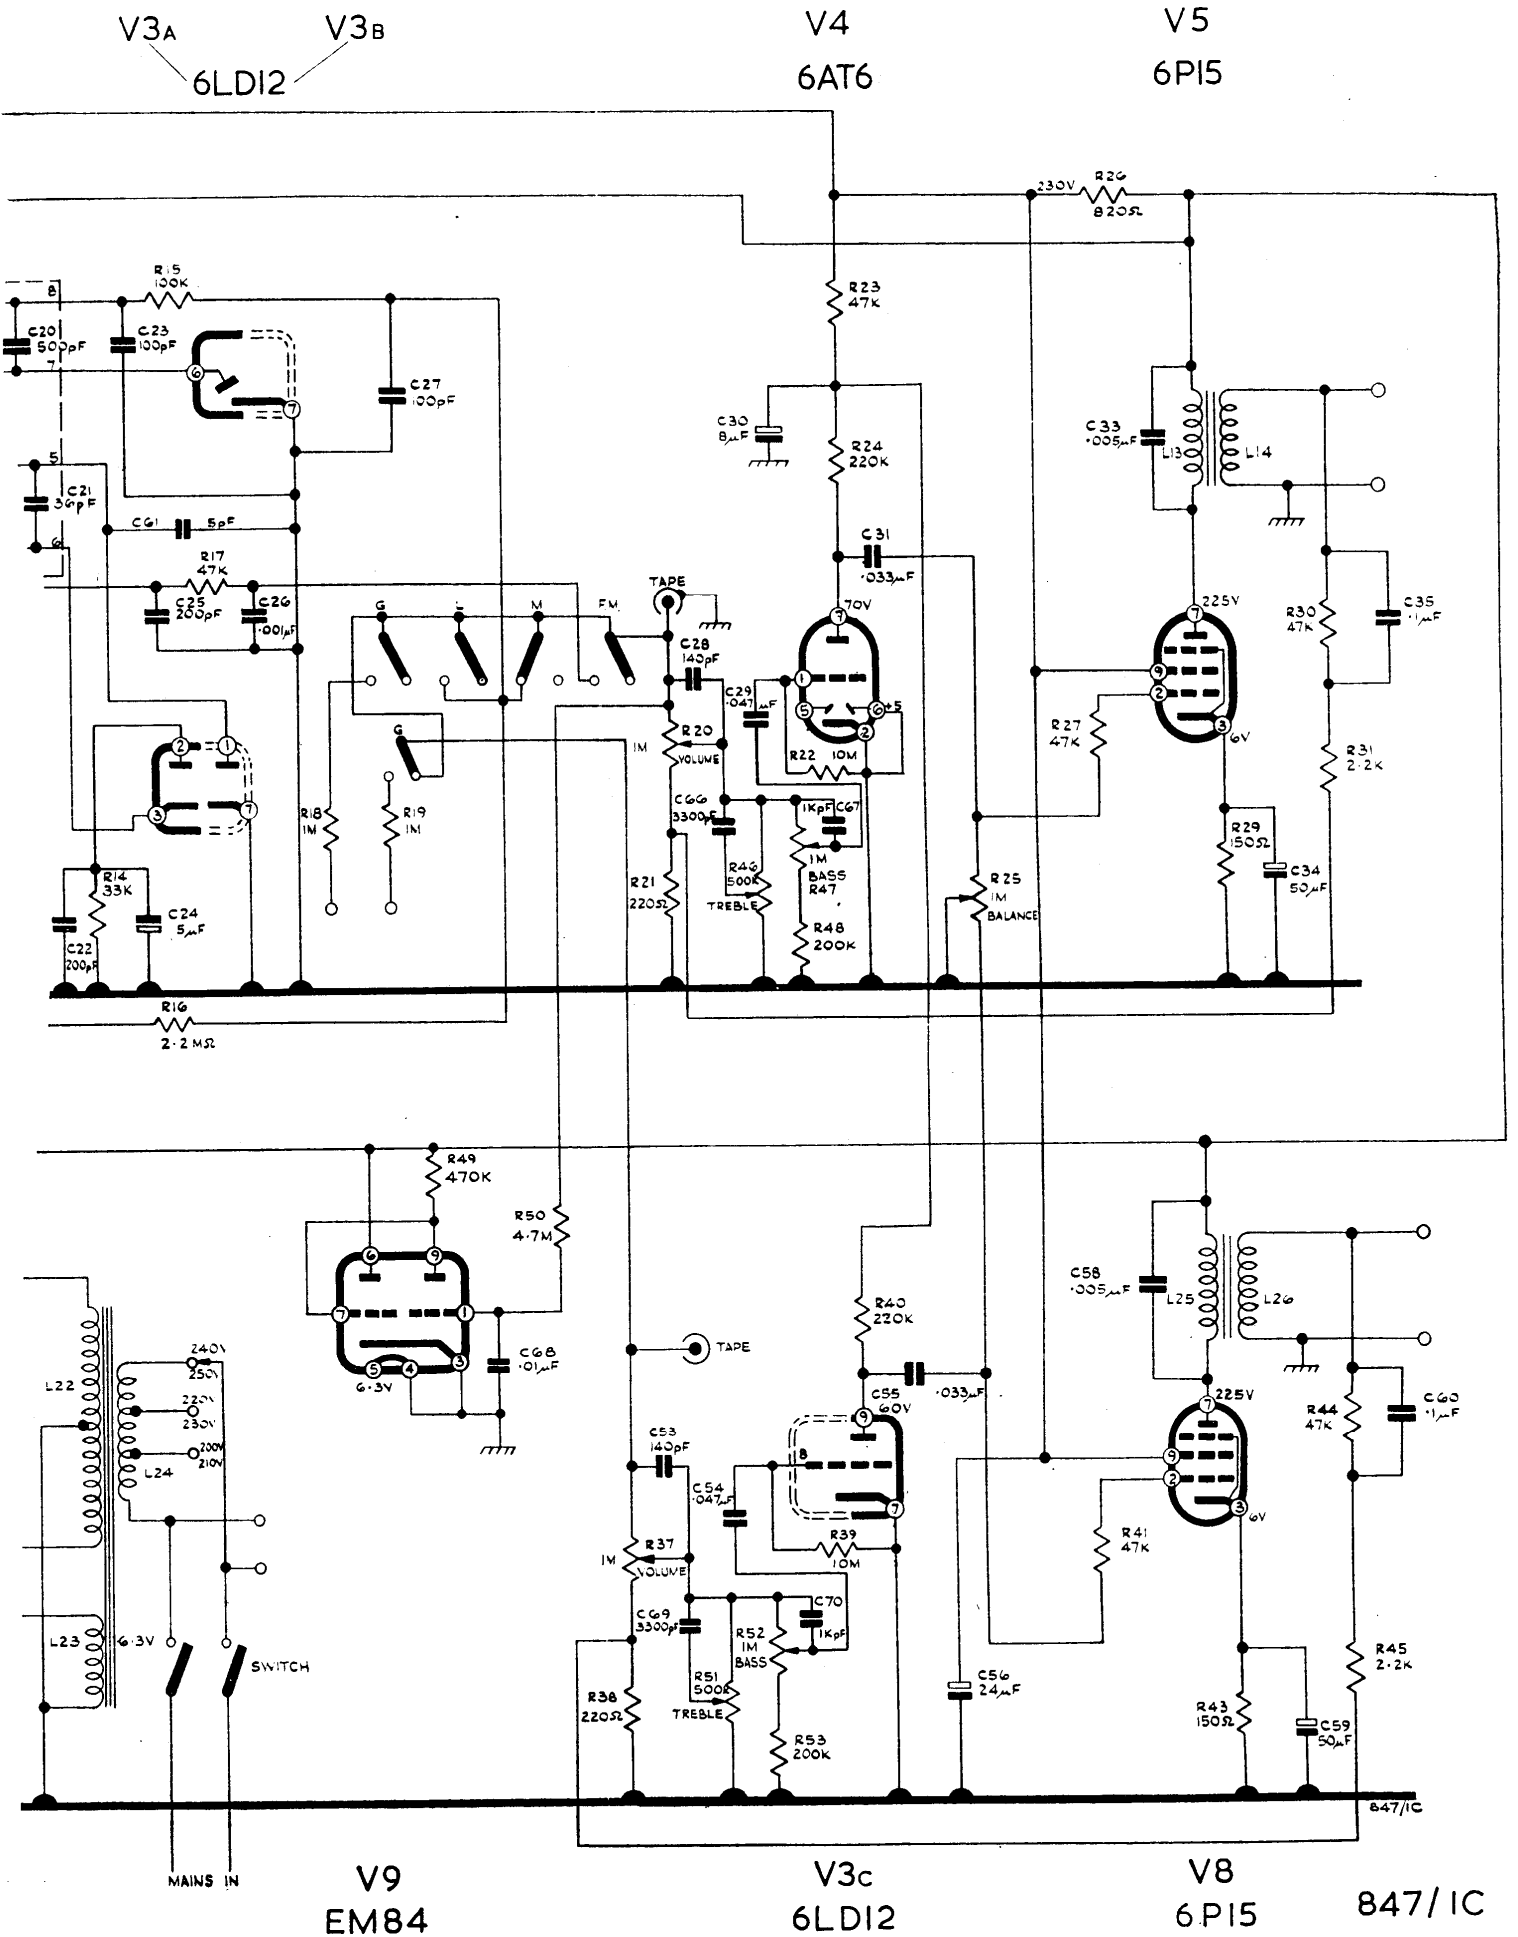

REGENTONE MODEL SRG25

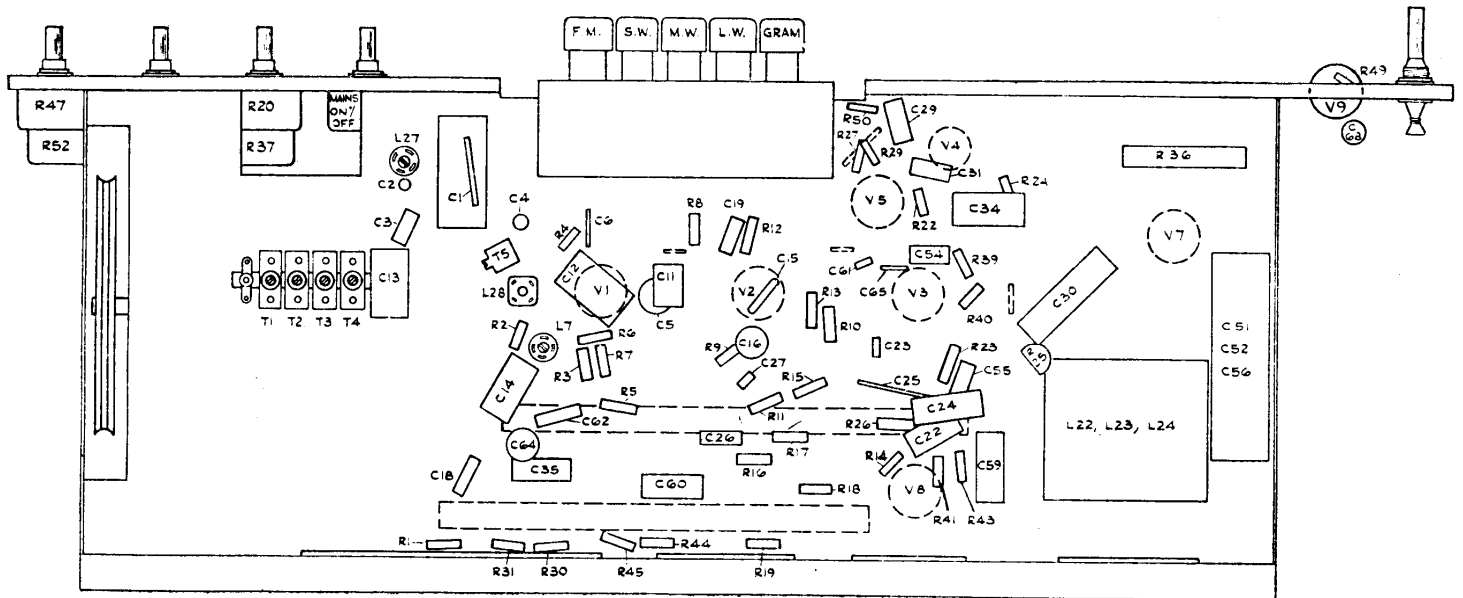

COMPONENT LAY-OUT DIAGRAM—REGENTONE MODEL SRG25

Wavebands: L.W. 142–290 kc/s.; M.W. 525–1630 kc/s.; S.W. 6–18.75 Mc/s.; V.H.F. 87–101 Mc/s.

R.G.D. Model 209: The chassis fitted to this stereogram is electrically similar to REGENTONE Model SRG25 but with Garrard Autoslim record unit.