5881 VALVE TYPE

DWG.No. 2100-60-58.DGM

THIRD ANGLE PROJECTION

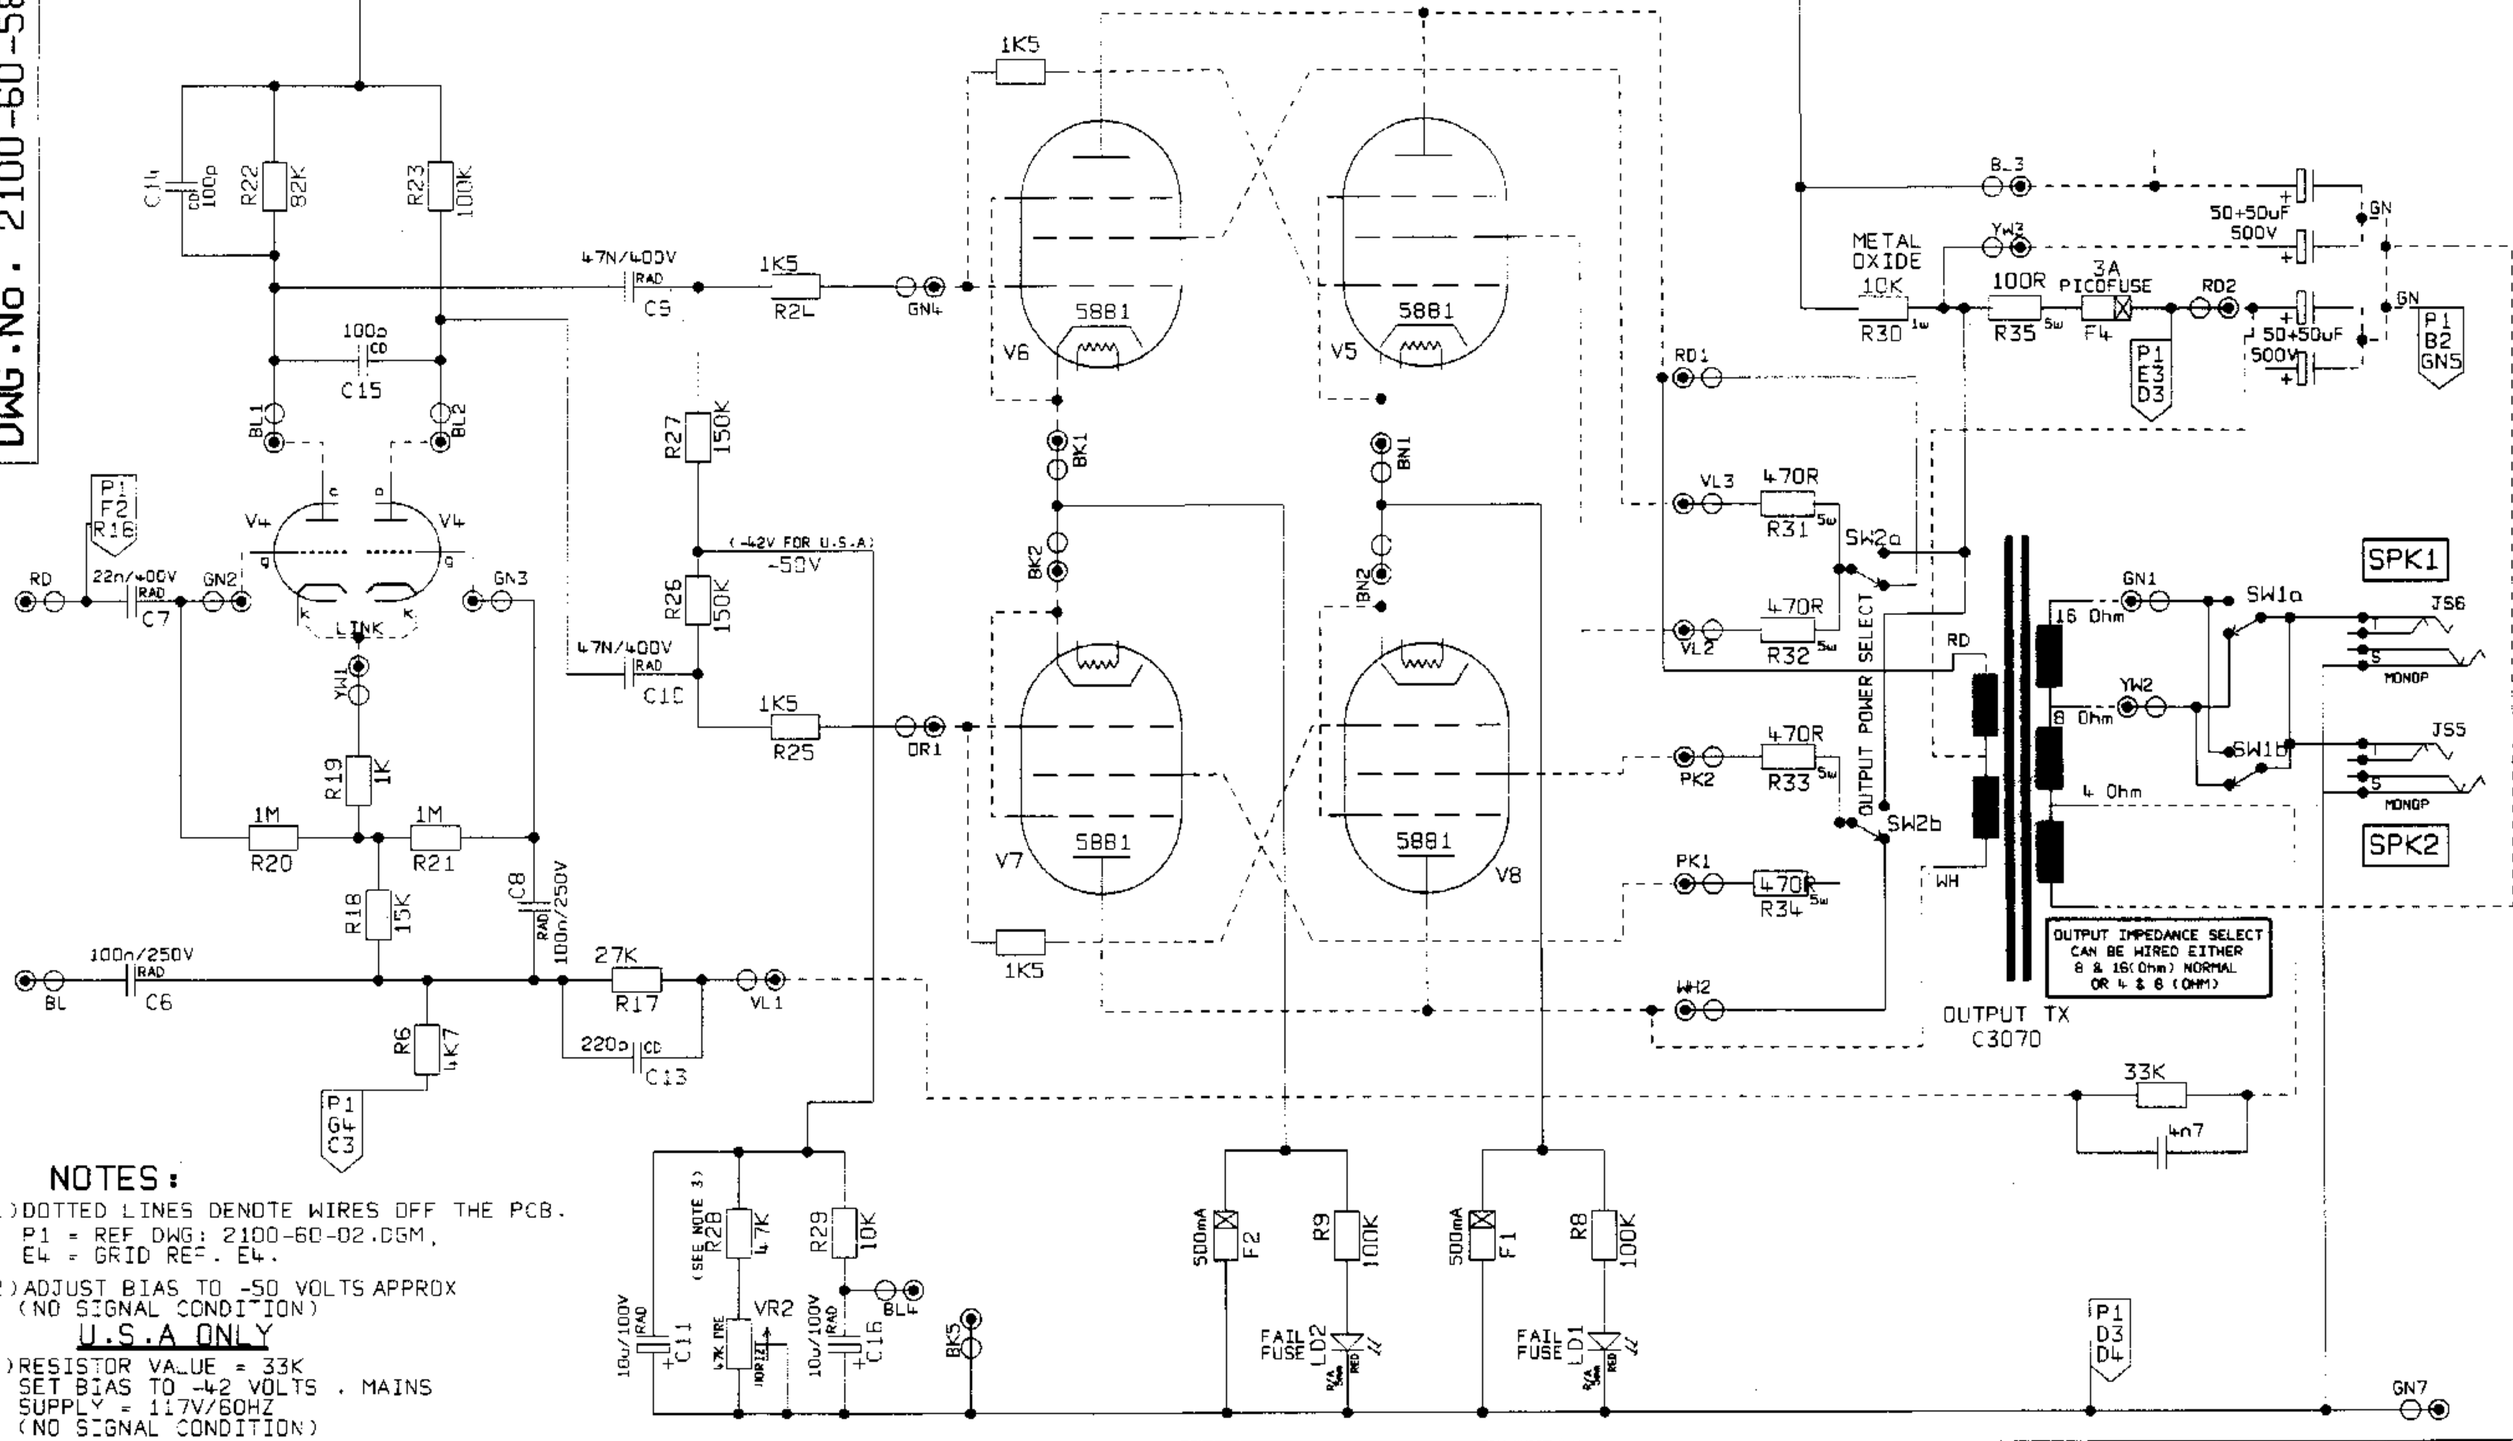

NOTES:

1) DOTTED LINES DENOTE WIRES OFF THE PCB.
   P1 = REF DWG: 2100-60-02.DGM,
   E4 = GRID REF. E4.

2) ADJUST BIAS TO -50 VOLTS APPROX
   (NO SIGNAL CONDITION)
   U.S.A ONLY

3) RESISTOR VALUE = 33K
   SET BIAS TO -42 VOLTS . MAINS
   SUPPLY = 117V/60HZ
   (NO SIGNAL CONDITION)

ISS	ECO NUMBER	DATE
9	0868	12/4/95
8	0688	17-11-94
7	0707	24/08/94
5	0444	8-11-93
4	0435	19-10-93
3	0408	24-8-93
2	0394	6-8-93

UNSPECIFIED HOLE DATA

A		H	
B		J	
C		K	
D		L	
E		M	
F		N	
G		P	

MATERIAL		DIMENSIONS IN	
MATERIAL THICKNESS		TOLERANCE (UNLESS OTHERWISE STATED)	
INTERNAL BEND RADII		DIMENSIONAL	
EXTERNAL B/A		CENTRES	
BEND DIE		ANGULAR	
DRAWN CJR	DATE 29/6/93	MODEL 2100SL-X 5881 VALVE TYPE	
CHECKED KSmith	DATE 3 5 95		
APPROVED	DATE		

COPYRIGHT EXISTS ON THIS DOCUMENT. IT MUST NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED AND MUST NOT BE COPIED OR IN PART) WITHOUT WRITTEN PERMISSION FROM

MARSHALL AMPLIFICATION PLC
DENBIGH ROAD, BLETCHLEY, MILTON KEYNES, MK1 1DG.
TEL (0908)375411 FAX (0908)375118

TITLE: POWER AMP CCT

DWG.No 2100-60-58.DGM (was 2100-60-02.dgm Page 2) ISSUE 9