


MULTIPLEX ALIGNMENT USING FM STEREO GENERATOR AND AUDIO OSCILLATOR

1.	SIGNAL GENERATOR	CONNECT SCOPE	ADJUST	REMARKS
1.	19KC to MPX Input.	Vert. In-put to pin 2 of V ₁ , low side to ground.	A1	Adjust for maximum.
2.	"	Vert. In-put to pin 2 of V ₂ , low side to ground.	A2	Adjust for maximum. Set scope to lock in 2 cycle waveform.
3.	"	Vert. In-put to point \diamond , low side to ground.	A3	Adjust for maximum 4 cycle waveform.
4.	67KC to MPX Input	"	A4, A5	Adjust for MINIMUM.
5.	20 KC to point \diamond low side to ground.	Vert. In-put to point \diamond , low side to ground.	A6	Adjust for MINIMUM.

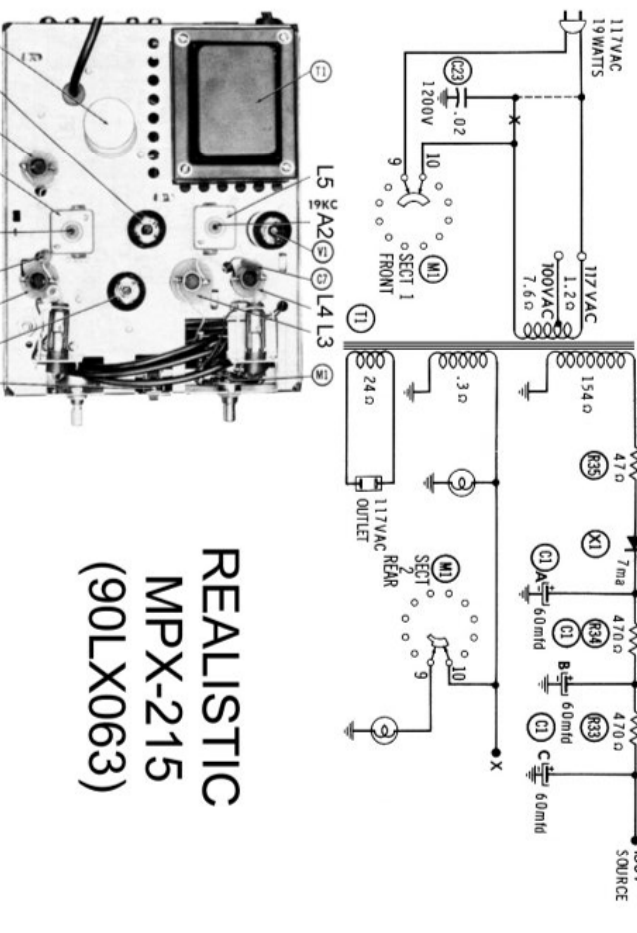

REALISTIC
MPX-215
(90LX063)