


J3	
J17	
S7	
T	
R2	
Q2	
DA10	
IC15	
CR37	
C48	
R20	
LAST USED	NOT USED

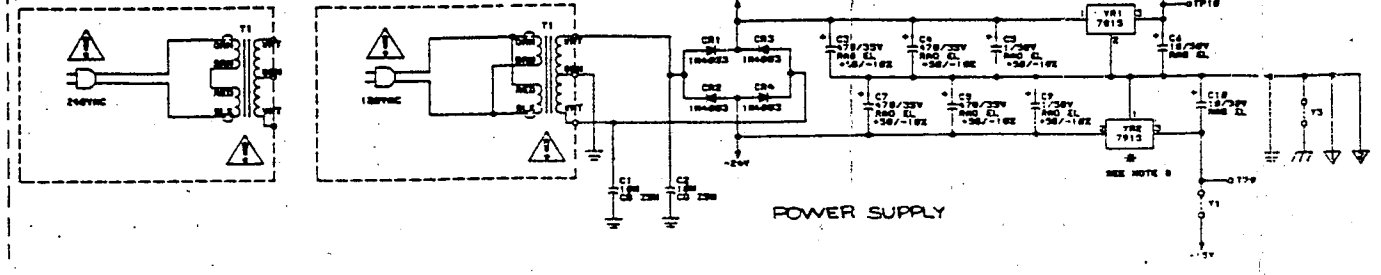

- NOTES:
UNLESS OTHERWISE SPECIFIED:
1. ALL RESISTORS ARE 1/4W, 5%, AND ARE EXPRESSED IN OHMS.
 2. ALL CAPACITORS ARE EXPRESSED IN MICROFARADS.
 3. ALL UNMARKED CAPACITORS ARE NYLON, +/-20%.
 4. ALL 0.1 25U CAPACITORS ARE +/-20%.
 5. ALL RAD EL CAPACITORS ARE +/-20%.
 6. ⚡ DENOTES GROUNDS ARE TIED CLOSE TOGETHER AND CONNECTED TO MAIN GROUND AT ONLY ONE POINT.
 7. ⚡ DENOTES GROUNDS ARE TIED CLOSE TOGETHER AND CONNECTED TO MAIN GROUND AT ONLY ONE POINT.
 8. # INDICATES HEATSINK ATTACHED TO DEVICE.

COMPONENTS MARKED WITH THIS SYMBOL HAVE CRITICAL SPECIFICATIONS IMPORTANT FOR PROTECTION FROM FIRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING, IT IS ESSENTIAL THAT ONLY MANUFACTURER'S SPECIFIED PARTS BE USED FOR REPLACEMENT. PRIOR TO THE RETURN OF THIS APPLIANCE TO THE CUSTOMER, AND UPON COMPLETION OF SERVICING, SERVICE PERSONNEL ARE REQUIRED TO TEST THIS UNIT FOR ADEQUATE INSULATION RESISTANCE BETWEEN THE POWER SUPPLY AND EXPOSED PARTS.

REVISIONS	DATE	BY	DESCRIPTION

APPROVAL

166 USED ON

dbx INC NEWTON, MA. 02195

SCHMATIC DYNAMICS PROCESSOR 120V/240V

SCALE: NONE SIZE: NUMBER 1774 REV 1

166