

SVETLANA TECHNICAL DATA EL 34/6CA7

High Performance Audio Power Pentode



T

he Svetlana™ EL34 is a glass envelope power pentode having a plate dissipation rating of 2.5 Watts with convection cooling. It is intended for audio frequency power amplification service in either pentode, ultralinear or triode connection and single or push-pull/parallel applications. The Svetlana EL34 has an indirectly-heated oxide cathode, which may be DC operated for the absolute best hum/noise performance.


The Svetlana EL34 plate is made from a laminated material that improves heat transfer and has superior performance under overload conditions which are often seen with guitar amplifiers. Close manufacturing specification tolerances and improved processing provide enhanced reliability and superior sonic performance. The high sensitivity of a pair or quad of Svetlana EL34's is an economical method to achieve high quality sound with a minimum of driving stage components.

The Svetlana EL34 is manufactured with the original Mullard design in the Svetlana factory in St. Petersburg, Russia, and is designed to be a direct replacement for any EL34/6CA7 or equivalent. The Svetlana EL34 gives electrical and audio performance very similar to that of the original Mullard EL34.

Characteristics

Svetlana Outline drawing

Electrical	Min.	Nom.	Max.
Heater:			
Voltage (AC or DC)	5.7	6.3	6.9 V
Current		1.6	A
Cathode:	Oxide-coated, unipotential		
Cathode-to-heater potential, max.	100 V		
Direct interelectrode capacitances, max.***			
Grid no.1 to cathode and grid no.3, grid no.2, base sleeve and heater	<16 pF		
Plate to cathode and grid no.3, grid no.2, base sleeve and heater	<0.6 pF		
Grid no.1 to plate	<1.1 pF		
Mechanical			
Operating Position	Any		
Base	JEDEC #8ET, octal, 8-pin		
Maximum dimensions:			
Height	113 mm (4.45 in.)		
Seated height	98 mm (3.86 in.)		
Diameter	32 mm (1.26 in.)		
Cooling	Convection		
Approximate net weight	60 g (2.1 oz.)		
***Without external shielding, nominal values			

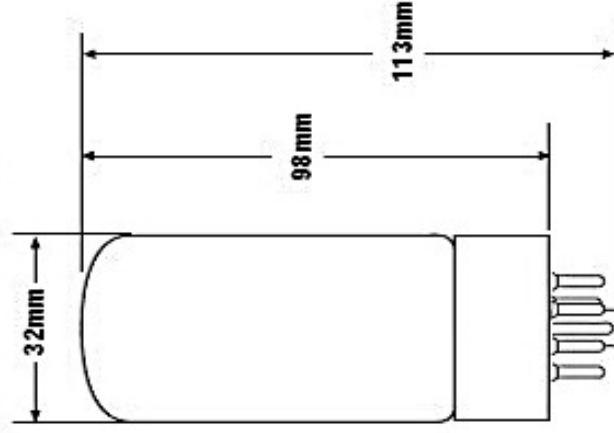

AF Power Amplifier

Maximum ratings	
DC plate voltage	800 V
Grid no.2 DC (screen) voltage	500 V
Grid no.1 (control) voltage	-100 V
DC cathode current	150 mA
Plate dissipation	25 W
Grid no.2 DC (screen) dissipation	8 W
Bulb temperature (surface hottest point)	250° C

**Bottom View
Octal Base Connections**



Svetlana
ELECTRON DEVICES

Headquarters:
8200 South Memorial Parkway
Huntsville, AL 35802
USA
Phone: 205 882 1344
Fax: 205 880 8077

Marketing & Engineering:
3000 Alpine Road
Portola Valley, CA 94028
USA
Phone: 415 233 0429
Fax: 415 233 0439

www.svetlana.com

4/97

Svetlana EL34/6CA7 High Performance Audio Power Pentode



Typical Operation

AF Power Amplifier, Class A1 (single tube)	
Plate Voltage	250 V
Grid 2 Screen Voltage	250 V
Grid 1 Control Voltage*	-14 V
Peak AF Grid 1 Control Voltage	14 V
Zero Signal Plate Current	100 mA
Maximum Signal Plate Current	105 mA
Zero Signal Grid 2 Screen Current (avg.)	15 mA
Transconductance (nominal)	11,000 μ S
Load Resistance	2000 Ohms
Output Power at 5% distortion	10 W

* Approximate Value (set to zero signal plate current)

Typical Performance EL34 Curves

