

# COMPACT DISC PLAYERS



NEC CD-803E



SEARS 57 E 9750C



MAGNAVOX FD1000



SANSUI PC-V1000

MANUFACTURER	Model	Frequency Response, Hz to KHz, $\pm$ dB	Dynamic Range, dB	S/N Ratio, -dB	Channel Separation, dB, at 1 KHz	Harmonic Distortion, %, at 1 KHz	Line Output Level, V	Required Load Impedance, Kilohms	Headphone Output = H, Headphone Output with Level Control = HL	Loading, Front = F, Top = T	Dimensions, inches	Weight, Lbs.	Price, \$	Notes
AIWA	DX-1000	0-20 +0.5, -0.7	90	90	90	0.003	2.0		HL	F	13 x 11 $\frac{1}{4}$ x 2 $\frac{3}{4}$	12 $\frac{1}{2}$	1000.00	
AKAI	CD-D1	20-20 $\pm$ 0.5	90	90	90	0.005	2.0			F	7.3 x 5.7 x 12.6	16.3	1000.00	
DENON	DCD-2000 DN-3000F	5-20 $\pm$ 0.5 20-20 $\pm$ 0.5	90 90	90 90	85 $\uparrow$ 85	0.03 0.007	1.4 $\uparrow$	100	HL HL	F T	12 $\frac{1}{8}$ x 5 $\frac{1}{8}$ x 9 $\frac{3}{8}$ 16 $\frac{1}{8}$ x 3 $\frac{3}{8}$ x 22 $\frac{1}{4}$	12 $\frac{1}{2}$ 79	995.00 8500.00	$\uparrow$ At 10 kHz. $\uparrow$ Output, +30 dBm.
DUAL	CD120	5-20 $\pm$ 0.5	90	90	85	0.003	1.4		HL	F	12 $\frac{1}{2}$ x 9 $\frac{1}{4}$ x 5 $\frac{1}{4}$		899.95	
FISHER	AD850	20-20	90	90	90	0.006			None	F	13 $\frac{1}{4}$ x 5 $\frac{3}{8}$ x 9 $\frac{5}{8}$	15	999.95	
HITACHI	DA1000 DA800	20-20 20-20	93 93	94 94	92 92	0.003 0.003	1.4 1.4		HL HL	F F	12 $\frac{5}{8}$ x 5 $\frac{3}{4}$ x 9 $\frac{1}{4}$ 17 $\frac{1}{4}$ x 4 $\frac{3}{8}$ x 10 $\frac{1}{2}$	12 $\frac{1}{2}$ 13	1000.00 1000.00	
JVC	XL-V1	5-20 $\pm$ 0.5	90	90	90				HL	F	12 $\frac{3}{4}$ x 5 $\frac{1}{8}$ x 9 $\frac{3}{4}$	12.3	1000.00	
KYOCERA	DA-01	20-20 $\pm$ 0.5	90	90	90	0.005	2.0	1.5		F	18 $\frac{1}{4}$ x 5 $\frac{1}{4}$ x 12 $\frac{3}{8}$	18 $\frac{1}{2}$	1050.00	
LUXMAN	DX-104	5-20 $\pm$ 3	90	90	90	0.004	$\uparrow$			F	16 $\frac{7}{8}$ x 5 $\frac{7}{8}$ x 13 $\frac{3}{4}$	21.6	1199.95	$\uparrow$ Fixed, 2.0 V; variable, 0-0.5 V.
MAGNAVOX	FD1000SL FD2000SL FD2020SL FD3030SL	20-20 $\pm$ 0.3 20-20 $\pm$ 0.3 20-20 $\pm$ 0.3 20-20 $\pm$ 0.3	90 90 90 90	90 90 90 90	90 90 90 90	0.004 0.004 0.004 0.004	2.0 2.0 2.0 2.0	10 10 10 10		T T T T	12 $\frac{1}{2}$ x 3 x 10 $\frac{1}{2}$ 16 $\frac{1}{2}$ x 3 $\frac{3}{4}$ x 12 16 $\frac{1}{2}$ x 3 $\frac{3}{4}$ x 12 16 $\frac{1}{2}$ x 3 $\frac{3}{4}$ x 12	11 13	800.00 800.00 850.00 950.00	
MARANTZ	CD 73	20-20	90	90	90	0.005	2			F	16 $\frac{3}{8}$ x 5 $\frac{1}{8}$ x 11 $\frac{1}{4}$	19	999.00	
MICRO SEIKI	CD-M1	20-20 $\pm$ 0.5	90	90	90	0.005	2.0	100	None	F	18 $\frac{1}{4}$ x 5 $\frac{1}{4}$ x 12 $\frac{3}{8}$	18 $\frac{1}{2}$	1100.00	
MITSUBISHI	DP-101	5-20 $\pm$ 0.5	96	90	90	0.004	2.5		HL	F	16 $\frac{3}{4}$ x 5 $\frac{1}{4}$ x 12 $\frac{1}{4}$	23	1050.00	
NEC	CD-803E	5-20 $\pm$ 0.5	90	90	70	0.01	$\uparrow$	100	HL	F	17 x 5 $\frac{1}{8}$ x 14 $\frac{1}{8}$	26.4	1300.00	$\uparrow$ Fixed, 1.5 V; variable, 0-1.5 V.
PHASE LINEAR	9500	20-20 $\pm$ 0.5	92	92	92	0.005	2.0	1	None	F	17 $\frac{1}{2}$ x 5 $\frac{1}{2}$ x 12 $\frac{1}{2}$	17	995.00	
SANSUI	PC-V1000	5-20 $\pm$ 0.5	90	90	90	0.004	2		H	F	17 x 4 $\frac{3}{8}$ x 11 $\frac{1}{8}$	22	1000.00	
SANYO	DA08	5-20	90	90	90	0.006	1.4	0.47	HL	F	13 $\frac{1}{2}$ x 5 $\frac{1}{2}$ x 10 $\frac{3}{4}$	15	999.95	
SEARS ROEBUCK	57 E 9750C	6-20	90	90	90	0.003	2.0		H	F	13 $\frac{1}{4}$ x 12 $\frac{1}{2}$ x 3 $\frac{1}{2}$	16	589.99	
SHARP	DX-3	5-20 $\pm$ 0.5	90	90	80	0.01	$\uparrow$	10		F	13 x 5 $\frac{7}{8}$ x 9 $\frac{1}{2}$	18	950.00	$\uparrow$ High, 2.0 V; low, 0.8 V.
SONY	CDP-101	5-20 $\pm$ 0.5	90	90	90	0.004	2	10	HL	F	14 x 4 $\frac{1}{4}$ x 12 $\frac{1}{8}$	16 $\frac{1}{2}$	900.00	
SONY ES	CDP-701ES	5-20 $\pm$ 0.5	95	95	90	0.003	2	10	HL	F	17 x 4 $\frac{1}{4}$ x 15 $\frac{1}{4}$	25 $\frac{1}{2}$	1500.00	
SYLVANIA	FDC303SL	20-20 $\pm$ 0.3	90	90	90	0.004	2.0	10		F	16 $\frac{1}{2}$ x 3 $\frac{3}{4}$ x 12		950.00	
TECHNICS	SL-P10 SL-P8 SL-P7	4-20 $\pm$ 0.5 4-20 $\pm$ 0.5 4-20 $\pm$ 0.5	96 96 96	96 96 96	90 90 90	0.003 0.003 0.003	2 2 2	75 75 75	HL HL F	F F F	17 x 5 $\frac{1}{4}$ x 12 $\frac{1}{2}$ 17 x 3 $\frac{1}{2}$ x 12 $\frac{3}{4}$ 12 $\frac{1}{2}$ x 3 $\frac{1}{2}$ x 12 $\frac{3}{4}$	22	1000.00 800.00 700.00	
TOSHIBA	XR-Z90	5-20 $\pm$ 0.3	90	90	90	0.004	$\uparrow$	100	HL	F	16 $\frac{1}{2}$ x 5 $\frac{3}{8}$ x 13 $\frac{3}{8}$	21 $\frac{3}{4}$	1000.00	$\uparrow$ Fixed, 2.0 V; variable, 0-5 V.
YAMAHA	CD-1	10-20 $\pm$ 0.5	90	90	90	0.005	2	100		F	17 $\frac{1}{8}$ x 14 x 4 $\frac{1}{8}$	29 $\frac{3}{4}$	1395.00	


# COMPACT DISC PLAYERS



SONY 101



DUAL CD120

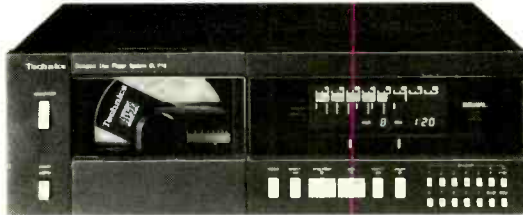

TECHNICS SL-P10



SANYO DAD 8

MANUFACTURER	Model	DISPLAY FUNCTIONS										ACCESS FUNCTIONS										Notes
		Elapsed Time: From Disc Start = D, From Track Start = T, Both = B.	Remaining Time: To Disc End = D, To Track End = T, Both = B.	Track/Program Selection Number?	Index Display?	Program-Recall Display?	Programmable: Number of Selections: Random = R, Sequential = S.	Repeat Functions: Entire Disc = D, Track = T, User-Marked Phrase = P, Index = I.	Random Access By Time Within Track?	Autobible Fast Search?	Auto Scan of Track Beginnings?	Remote Control Type: Infrared = I, Wired = W, Gives Confirmation Beep = B.	No. of Remote Control Functions	Output Level Control?	Decode System: 16 Bit = A, 14 Bit Oversampling = B, To bit Oversampling = B.	Filteration: Digital = D, Analog = A, Both = B.						
AIWA	DX-1000	B		Yes		Yes	16R	D/T	No	No	Yes			Yes	A	A						
AKAI	CD-D1	T		Yes	Yes	Yes	24R	D/T/P	Yes	No	Yes	None		No	B	B						
DENON	DCD-2000 DN-3000F	B B	B	Yes Yes	No Yes	Yes Yes	15R	D/P	No Yes	No Yes	Yes	W	4	Yes Yes	A C	A B						
DUAL	CD120	B		Yes		Yes	15R	D/T/P	No	No	No	None		Yes								
FISHER	AD850	B	Yes	Yes	No	Yes		Yes		Yes					B	D	Sync recording with some Fisher decks.					
HITACHI	DA1000 DA800	T T		Yes Yes	No Yes	Yes Yes	15R 15R	D/T/P D/T/P/I			Yes No			Yes Yes	A A	A A						
JVC	XL-V1	T		Yes			15R	D/T/P	No		Yes			Yes	A							
KYOCERA	DA-01	B		Yes	Yes	Yes	24R	D/T/P	Yes	No	No	None		Yes	C	B						
LUXMAN	DX-104	T	T	Yes	Yes	Yes	8R	D/T/I		Yes	Yes			Yes	A	D						
MAGNAVOX Philips	FD1000SL FD2000SL FD2020SL FD3030SL	B B B		Yes Yes Yes Yes		Yes Yes Yes Yes	15R 15R 15R 15R	D/T D/T D/T D/T	No No No No	No No No No	No No No No			No No No No	B B B B	B B B B						
MARANTZ	CD73			Yes	No		15R	D/T	No	No	No	Opt. I	4	No	A	D						
MICRO SEIKI	CD-M1	B	B	Yes	Yes	Yes	24R	D/T/P/I	Yes	No	No	None		Yes	C	B						
MITSUBISHI	DP-101	B		Yes	Yes	Yes	30R	D/T/P/I	Yes	Yes	No	I	24	No	A	B						
NEC	CD-803E	B	B	Yes	Yes	Yes	99R/S	D/T/I	No	Yes	Yes	I†	11	Yes	A	B	†Gives confirmation light.					
PHASE LINEAR	9500	B	No	Yes	Yes	Yes	24R	D/T/P/I	Yes	No	Yes	None		Yes	C	B						
SANSUI	PC-V1000	T		No	Yes	Yes		D/T		Yes	Yes	I	13	No	A	D						
SANYO	DAD8	B	B	Yes		Yes	R	D/T/P	Yes		Yes	None			A							
SEARS ROEBUCK	57 E 9750C	No	No	Yes	Yes	No	R	D/T	No	No	No	None			A	B						
SHARP	DX-3	T		Yes	No	No	20S	D/T	No	No	No			No	A	A						
SONY	CDP-101	D	D	Yes	No	Yes	99S	D/T/P	No	Yes	No	I/B	11	No	A	A	Anti-shock, timer play, auto pause.					
SONY ES	COP-701ES	D	B	Yes	Yes	Yes	99S, 8R	D/T/P/I	Yes	Yes	Yes	I/B	11	No	A	A	Timer play.					
SYLVANIA	FDC303SL	B		Yes		Yes	15R	D/T	No	No	No			No	B	B						
TECHNICS	SL-P10 SL-P6 SL-P7	B B B	B B	Yes Yes Yes	No Yes Yes	Yes Yes Yes	31R/S 16R/S 0	D/T/P D/T/P D/T	Yes Yes Yes	No Yes Yes	No Yes No	I		Yes Yes Yes	A A A	A A A						
TOSHIBA	XR-Z90	B		Yes	Yes	Yes	8R	D/T/P	Yes	No	Yes	None		Yes	A	A						
YAMAHA	CD-1	T		Yes	No	Yes	15R	D/T/P	Yes	No	No			Yes	B	B	Dual analog to digital conversion with dual filtration.					