



NOTES:

1. RESISTANCE VALUES IN OHMS AND 1/2 WATT 5%, UNLESS NOTED OTHERWISE.
  2. ALL CAPACITORS ARE RATED IN MFD AND AT 100V, UNLESS NOTED OTHERWISE.
- ⊖ INDICATES SCREW DRIVER ADJ.
  - ⚠ USED ONLY ON GIBSON 4 MODEL.
  - ⚠ USED ONLY ON GIBSON 5 & 6 MODELS.
  - ⚠ ADJ. TR-1 (BIAS POT) AT 120 V LINE, 4 OHM LOAD, 5 MV ACROSS R26 & R27.
  - ⚠ ADJ. TR-2 (REVERB SENSITIVITY) FOR MAXIMUM REVERB WITHOUT FEED BACK.
  - ⚠ ADJ. TR-3 (TREMOLO SENSITIVITY) TILL TREMOLO JUST STOPS WITH INTENSITY CONTROL OFF.

BOTTOM VIEWS

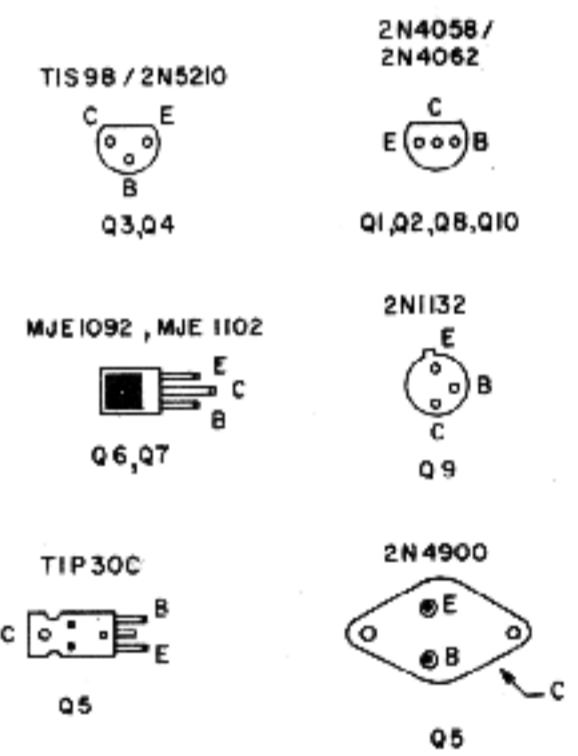

TOP VIEWS

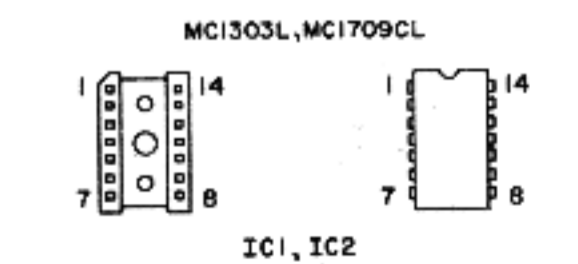

SCHEMATIC DIAGRAM

1971

GIBSON 50, 60, 70 AND 80 MODELS

DRAFTSMAN HMM	CHECKED RCC	APP RCC	DATE 4-22-71	IDO22
------------------	----------------	------------	-----------------	-------