



NOTES:

1. RESISTANCE VALUES IN OHMS AND 1/2 WATT 5%, UNLESS NOTED OTHERWISE.
  2. ALL CAPACITORS ARE RATED IN MFD AND AT 100V, UNLESS NOTED OTHERWISE.
- ⊖ INDICATES SCREW DRIVER ADJ.
  - ⚠ USED ONLY ON GIBSON 4 MODEL.
  - ⚠ USED ONLY ON GIBSON 5 & 6 MODELS.
  - ⚠ ADJ. TR-1 (BIAS POT) AT 120 V LINE, 4 OHM LOAD, 5 MV ACROSS R26 & R27.
  - ⚠ ADJ. TR-2 (REVERB SENSITIVITY) FOR MAXIMUM REVERB WITHOUT FEED BACK.
  - ⚠ ADJ. TR-3 (TREMOLO SENSITIVITY) TILL TREMOLO JUST STOPS WITH INTENSITY CONTROL OFF.

BOTTOM VIEWS

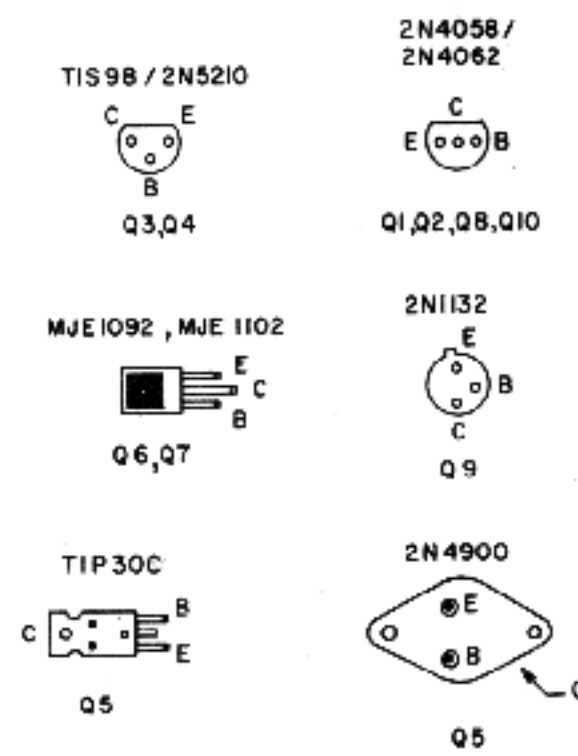

TOP VIEWS

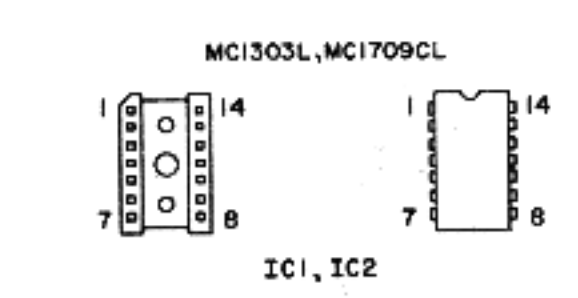

**Gibson**

SCHEMATIC DIAGRAM  
1971  
GIBSON 50, 60, 70 AND 80 MODELS

DRAFTSMAN HMM	CHECKED RCC	APP RCC	DATE 4-22-71
			ID022