



TX-9500II

KC KU

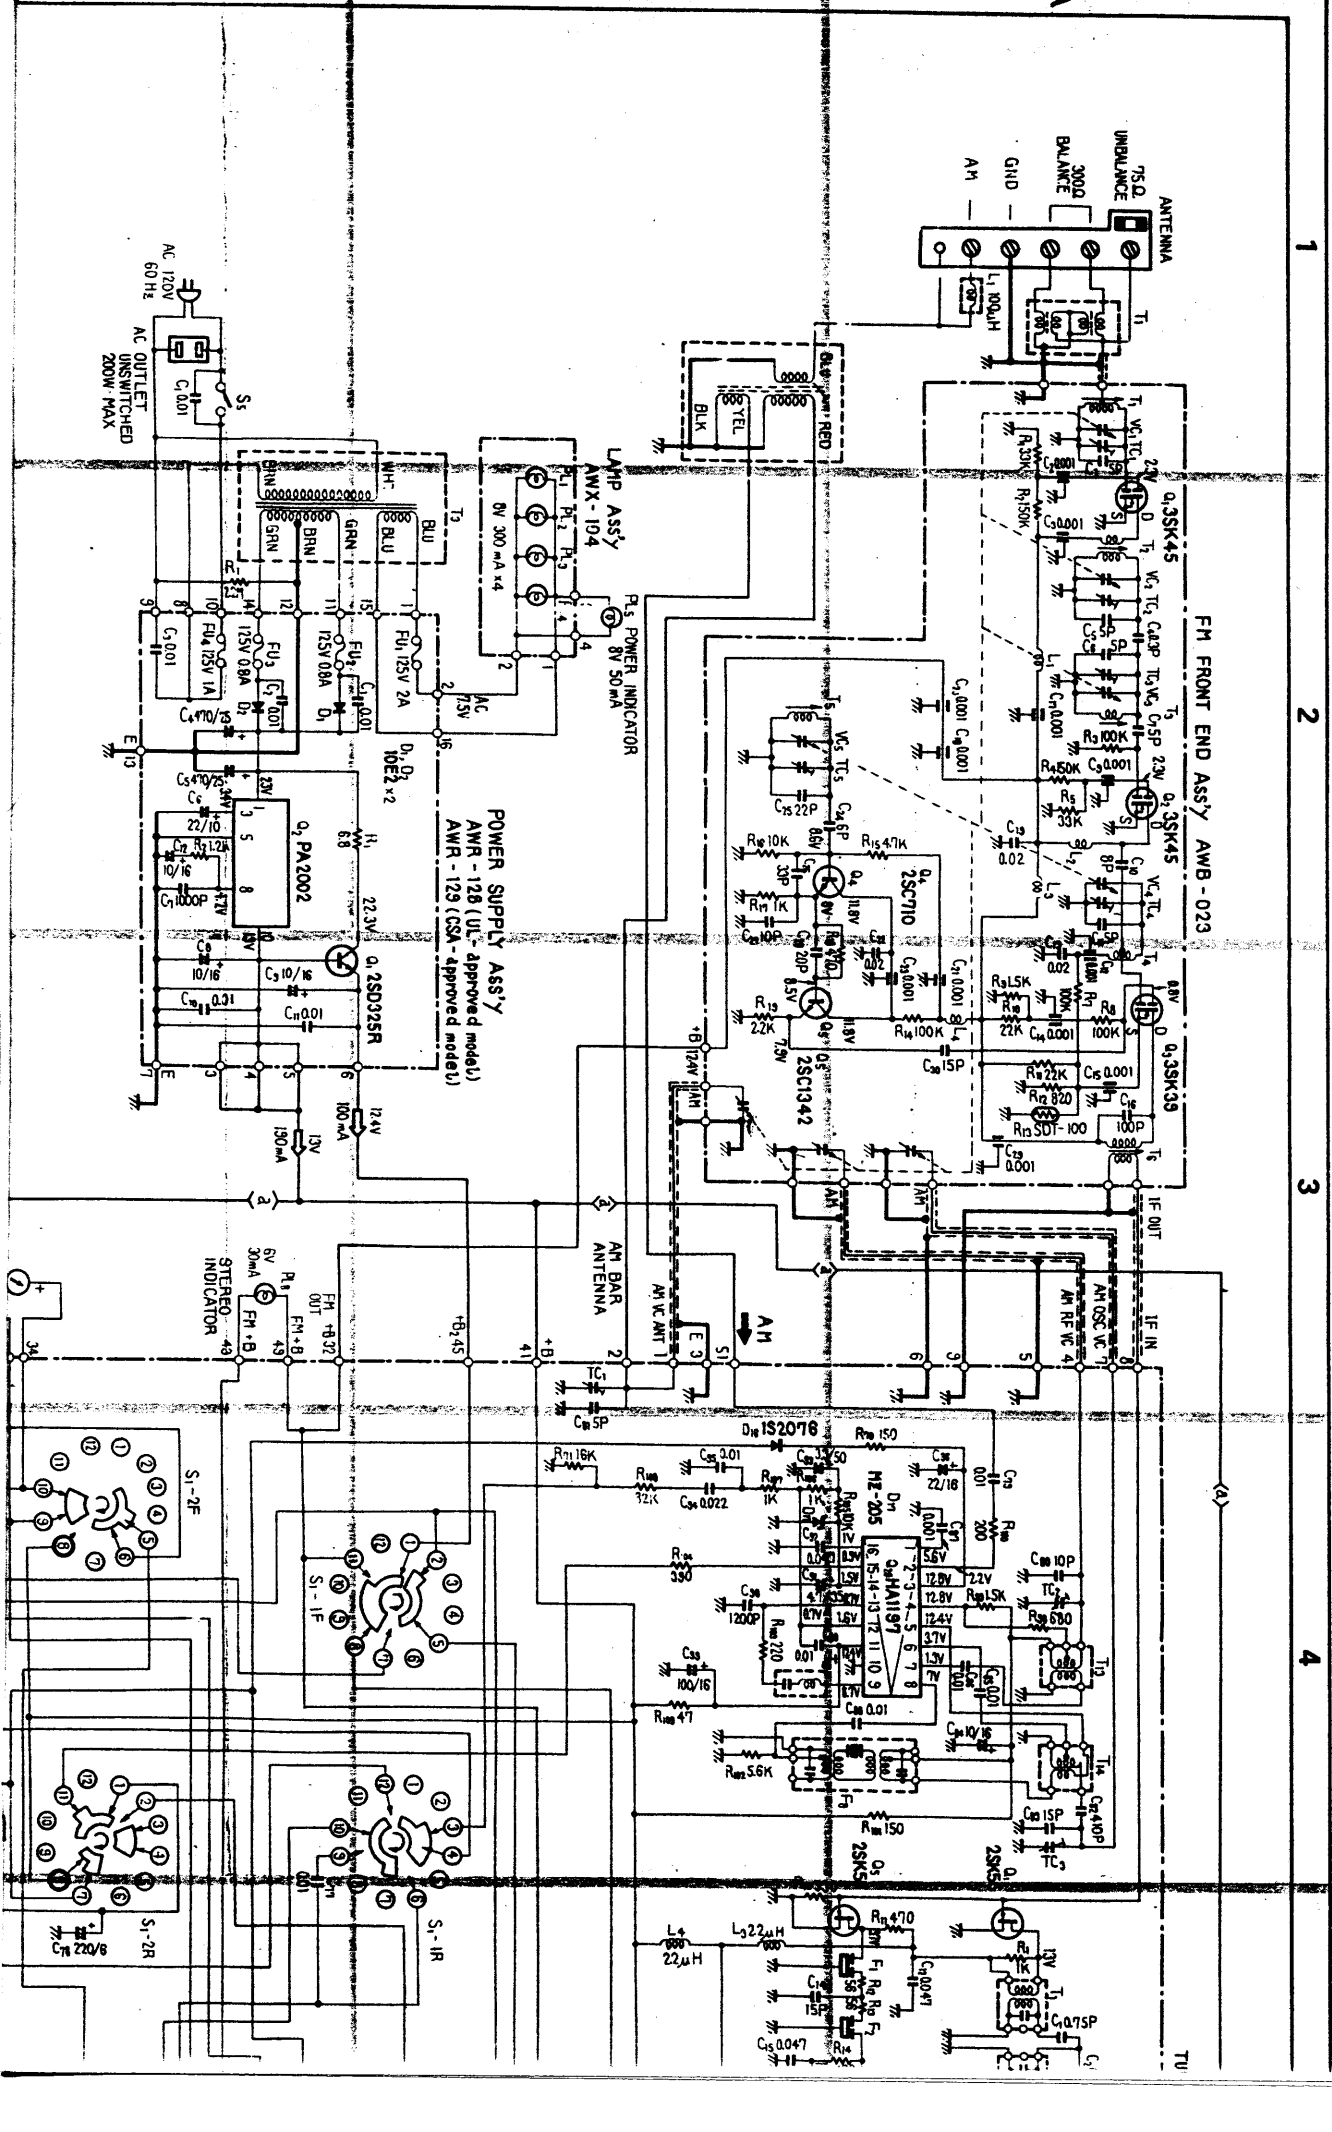

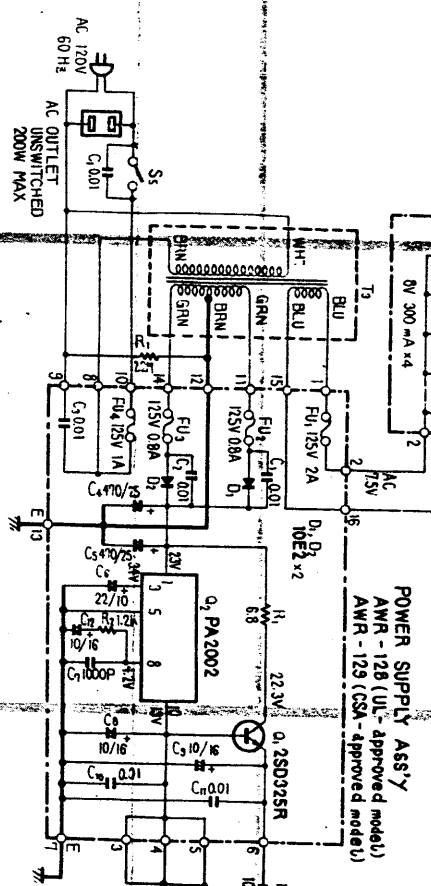

POWER SUPPLY ASS'Y
AWR-128 (UL-Approved model)
AWR-129 (CSA-Approved model)

SWITCHES

- S1: FUNCTION
 1. AT
 2. FM AUTO
 3. FM IMPX NOISE FILTER
 4. FM MONO
- S2: FM MUTING
 OFF → 1 → 2
- S3: REC LEVEL CHECK
 ON → OFF → MULTIPATH
- S4: IF BAND
 WIDE → NARROW
- S5: POWER
 ON → OFF
- S6: DE-EMPHASIS
 75 μS → 25 μS

RESISTORS:
 IN OHM, 1/4W, ±5% TOLERANCE UNLESS OTHERWISE NOTED
 K: KΩ M: MΩ

CAPACITORS:
 IN μF UNLESS OTHERWISE NOTED P: pF

NOTES:
 ⇄ : DC CURRENT AT NO INPUT SIGNAL
 (V) : DC VOLTAGE AT NO INPUT SIGNAL
 [V] : SIGNAL VOLTAGE AT FM, 400Hz, 75kHz DEV.
 DC VOLTAGE AT NO INPUT SIGNAL
 V : AT WIDE
 (V) : AT NARROW

