


# REALISTIC®

## HAND HELD DYNAMIC MICROPHONE


Catalog Number: 21-1172

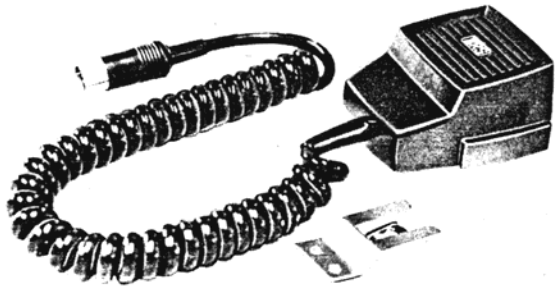

### SPECIFICATIONS

Type : Dynamic, hand held, with push-to-talk switch  
 Impedance : 600 ohms  
 Output : -70 dB at 1 kHz (0 dB = 1 V/ $\mu$ bar);  
 = 0.25 millivolts  
 Frequency : 300-7,000 Hz  
 Directivity : Omni-directional  
 Cable : Coiled cord, terminated with 5-pin DIN plug  
 Accessories: Clip-hanger ... 1  
 Screw ... 2

### SCHEMATIC DIAGRAM

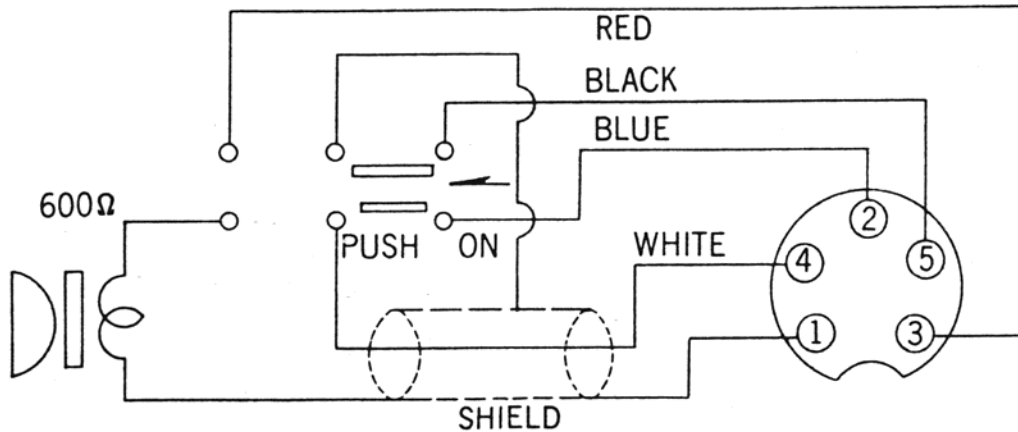

### Function/Operation of Mic Connector Pins

Pin Number	Button Out (Receive)	Button In (Transmit)
1	Shield/Ground	Shield/Ground
2	Connected to Pin 4	Floating free
3	Floating free	Grounded to Pin 1
4	Connected to Pin 2	Audio "hot"
5	Grounded to Pin 1	Floating free