


SCHEMATIC DIAGRAM

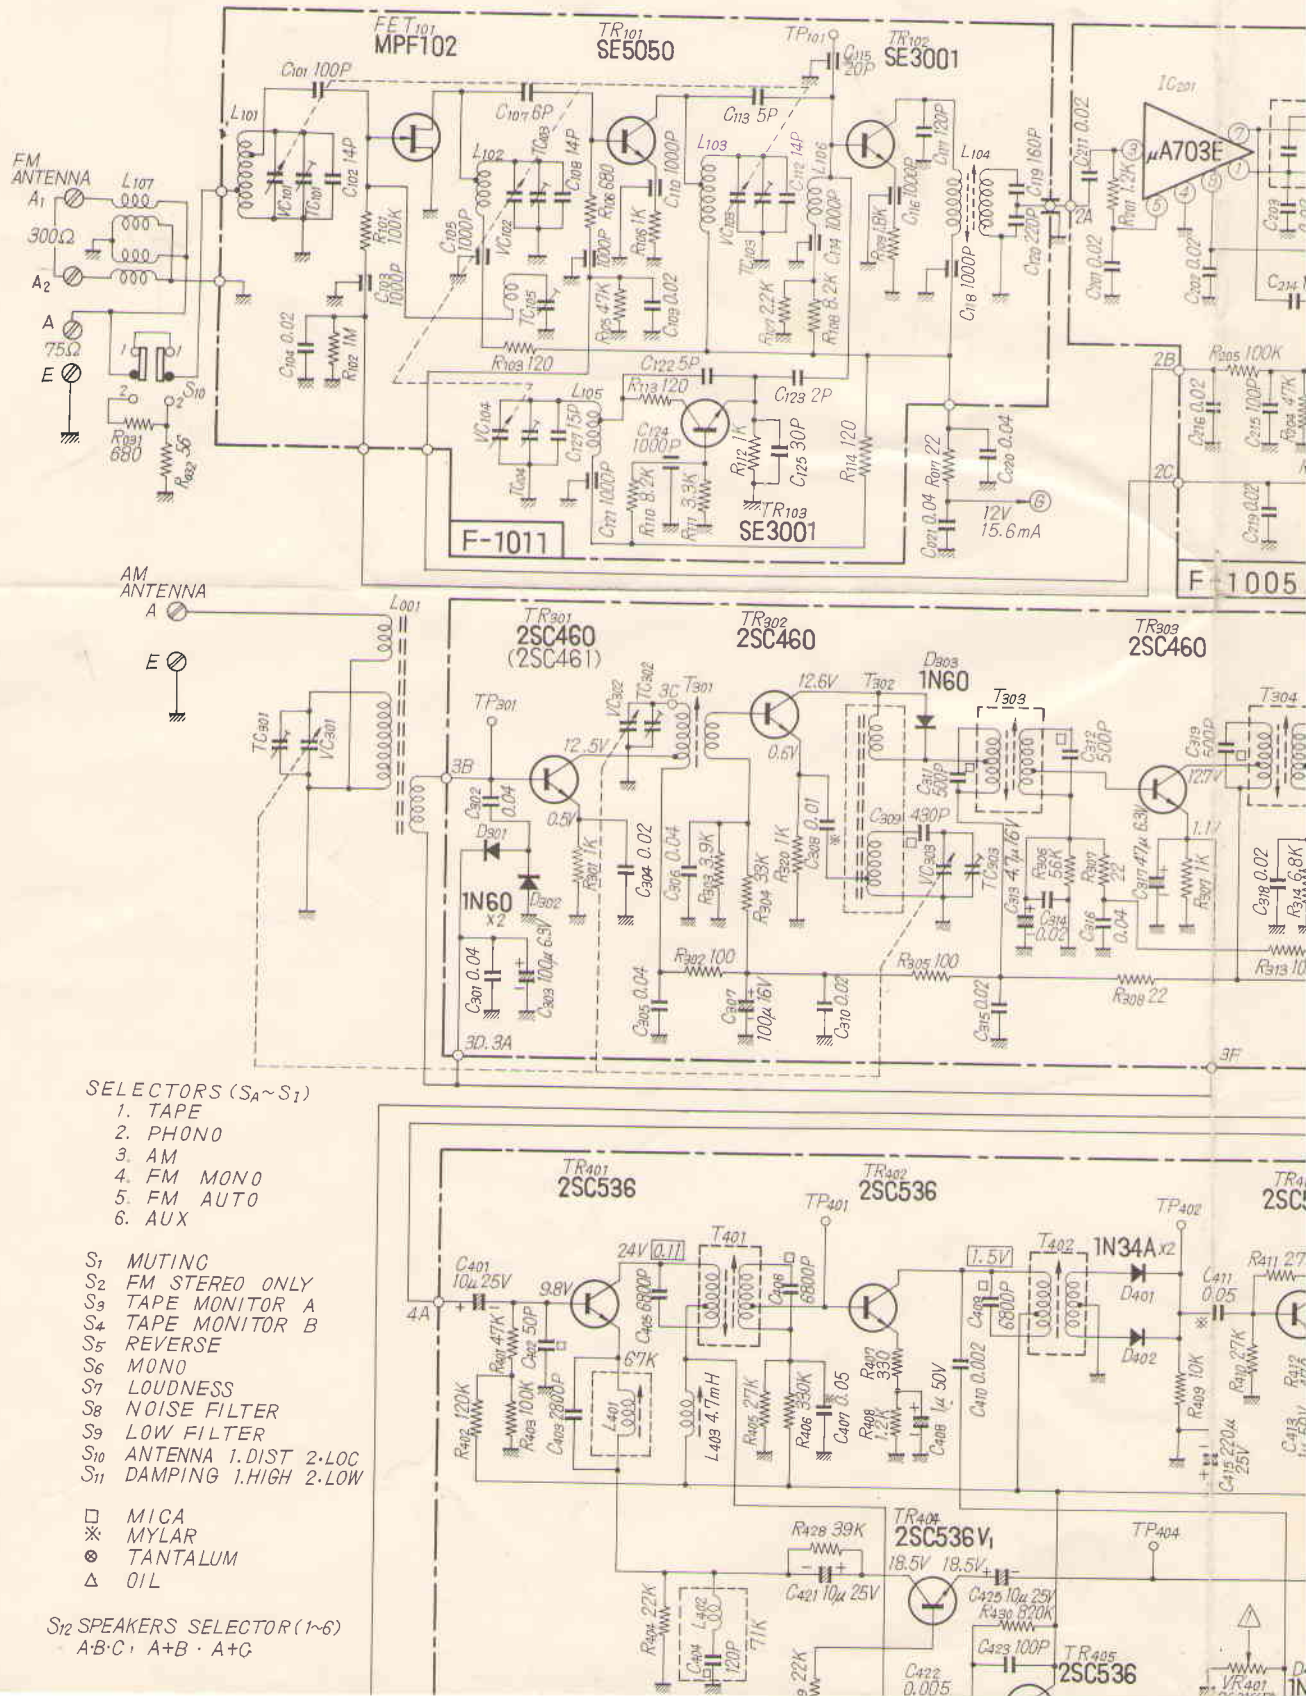

SELECTORS (S_A~S₁)

1. TAPE
2. PHONO
3. AM
4. FM MONO
5. FM AUTO
6. AUX

- S₁ MUTING
- S₂ FM STEREO ONLY
- S₃ TAPE MONITOR A
- S₄ TAPE MONITOR B
- S₅ REVERSE
- S₆ MONO
- S₇ LOUDNESS
- S₈ NOISE FILTER
- S₉ LOW FILTER
- S₁₀ ANTENNA 1.DIST 2.LOC
- S₁₁ DAMPING 1.HIGH 2.LOW


- MICA
- ※ MYLAR
- ⊙ TANTALUM
- △ OIL

S₁₂ SPEAKERS SELECTOR (1~6)
A·B·C, A+B ·A+C

SANSUI 5000 SCHEM


- ⊗ MYLAR
- ⊙ TANTALUM
- △ OIL

S₁₂ SPEAKERS SELECTOR (1-6)
A·B·C, A+B·A+C

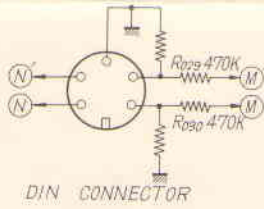


F-1006

Figures in the square □ indicate the peak-to-peak value at 19kHz or 38kHz

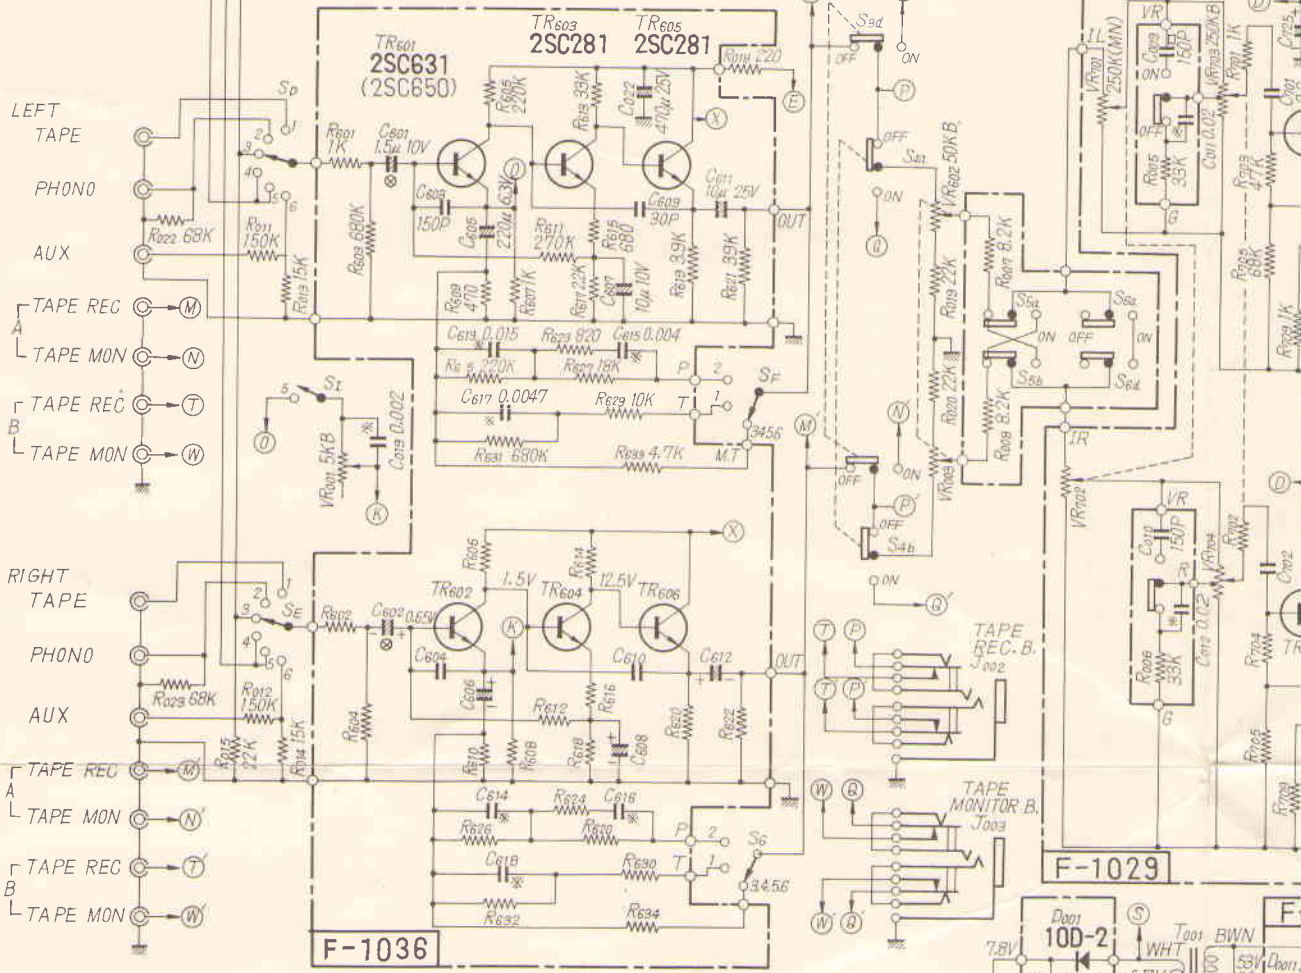


F-1036

F-1029

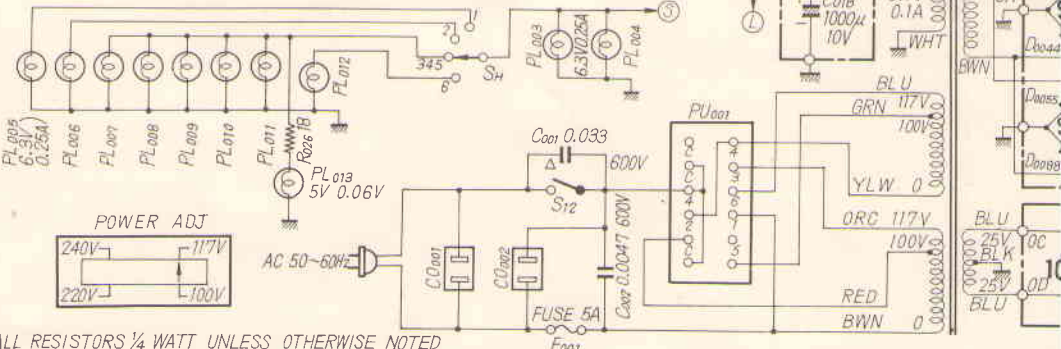

ALL RESISTORS 1/4 WATT UNLESS OTHERWISE NOTED

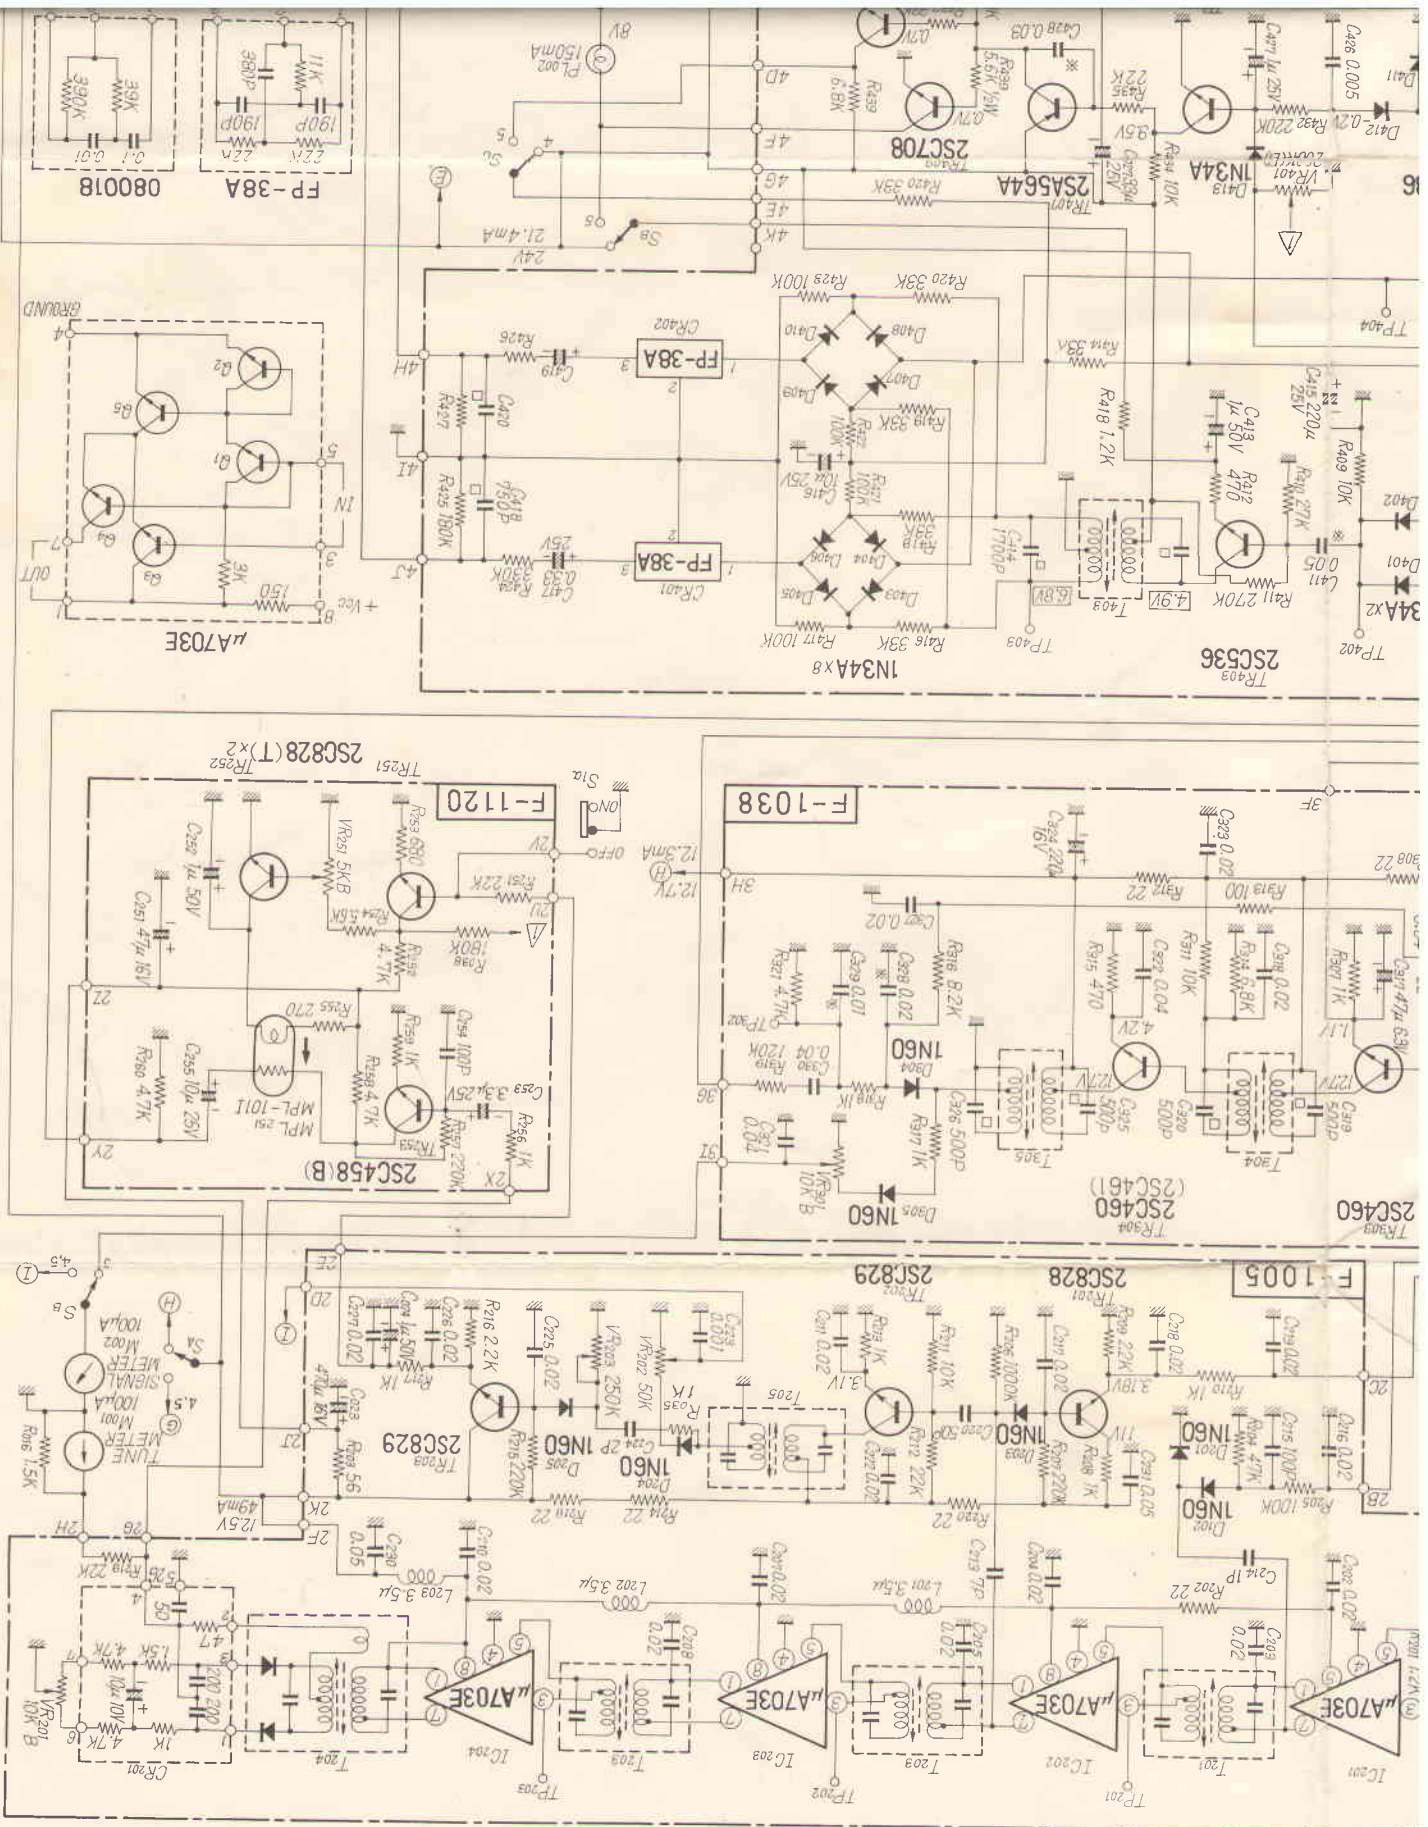

SANSUI ELECTRIC COMPANY LTD.

Printed in Japan

